

atom'air

AMBIENCE IN MOTION

# Exhaust Fans and Bathroom Heaters



evolt

QUALITY, RELIABILITY, VALUE

atom'air

# Ambience in motion

Bring a peaceful ambience to your bathroom, laundry or powder room with the Atom Air range of **exhaust fans** and 3-in-1 **bathroom heaters**, exhausts and LED lights.

With a solution for all applications, these powerhouses deliver **efficient extraction**, making sure it's hot air and not energy bills going through the roof.





## Warranty

Buy with confidence, knowing you are covered by Atom's comprehensive warranty.

We provide a leading **3-year** replacement warranty on the entire range of Atom Air **exhaust fans**.

For homeowners, bathroom heaters have a **3-year in-home warranty** to cover an electrician in the event of a product fault.



Find out more

## Choosing an exhaust fan

Without proper ventilation, there is a very real risk that moisture and mould can build up, making extra work in cleaning and maintenance, and potential longer term health problems. Left unchecked over a longer period, it can cause more serious issues, such as structural damage to the property.

### Size matters

It is critical to choose a fan with sufficient airflow to ensure that it is fit for purpose and can handle the volume of steam created in your bathroom. To work out which exhaust is going to be sufficient for your space, there are a number of things to consider. Firstly, calculate the volume of the room by multiplying the height, width, and length.

The second factor to consider is the number of air changes per hour that are required – meaning how many times the fan has extracted the total volume of air from the room. What is appropriate will differ depending on the type of the room.

For example, we recommend 10 air changes per hour for a powder room, toilet or laundry, and 15 air changes per hour for a full bathroom with shower.




### Adequate ventilation

For the exhaust fan to function effectively, an equal volume of replacement air must be able to enter the room; the fan will not function efficiently in an airtight room. This is generally via an open window, vent or drawn under the door. Choose an exhaust fan that has a draught stopper and ensure that the ducting is properly sealed to prevent air from leaking back into the bathroom.

### Location, location, location

For best results in removing moisture, the exhaust fan should be positioned as close as possible to the source of the moisture and away from any source of replacement air. Placing the exhaust away from doors or windows creates cross-ventilation, ensuring that it can effectively service the entire room.

For best results, we do not recommend placing exhaust fans and bathroom heaters directly above shower recesses. Please refer to AS/NZS 3000 in relation to individual models for further information on wet zone requirements when locating exhausts or bathroom heaters close to, or above showers and other wet zones.

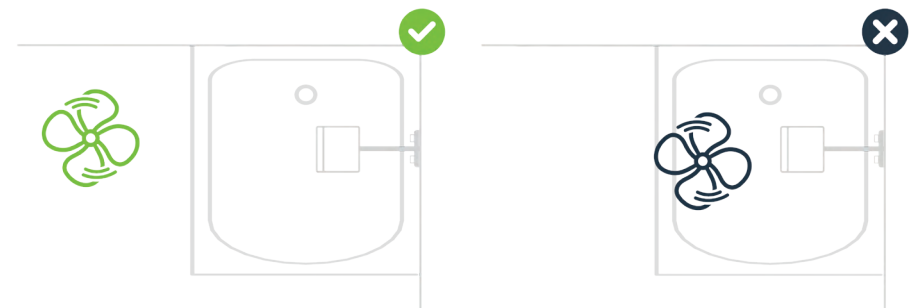

### Ducting

Building regulations dictate that in most cases, exhaust fans must be ducted to the outside, and not into a ceiling or wall cavity. For optimal performance of your exhaust fan, it's important to keep duct runs as short as possible and without excessive bends. Lengthy ductwork or unnecessary turns increases the effort required from the fan to extract air, reducing its efficiency.

### Other factors to consider

There are several factors that might suggest you require a more powerful exhaust fan.

- A high ceiling means that there is a larger volume of air and the exhaust is positioned further away from the moisture source, making it more challenging for the exhaust fan to effectively remove moisture.
- Open showers, with their popular clean and open design, can result in the dispersal of more steam, leading to a need for a more powerful exhaust fan.
- High humidity levels can increase the amount of moisture in the air and slow down air movement, further hindering the efficiency of the exhaust fan.



# Exhaust fans

Exhaust fans are integral in bathrooms, ensuites and powder rooms for preventing and removing **moisture** and smells, and generally maintaining a pleasant environment.

Powered by an **energy-efficient** motor, Atom Air exhausts are supplied with a flex and plug, making them **DIY-friendly**.

Eclipse.....	10
Cust .....	14
Proton.....	16



**3YR**  
Return to base warranty



**DIY**  
install



**Quiet operation**  
<45dB



Find out more

## Eclipse

Keep your air fresh and healthy with the Eclipse ducted exhaust fan. Supplied with flex and plug for DIY installation, the Eclipse has an easy to clean matte white fascia, with square and black options also available.

### Product features

- Powerful ball bearing motor for superior reliability
- Draught stopper for improved energy efficiency
- Enjoy quiet operation
- Supplied with 0.9m flex and plug for easy DIY installation
- 3-year return to base warranty for peace of mind

### Accessories



16776 ECLIPSE/ TRIM/240/B/RD    16777 ECLIPSE/ TRIM/290/B/RD    16778 ECLIPSE/ TRIM/240/WH/SQ    16779 ECLIPSE/ TRIM/290/WH/SQ    16780 ECLIPSE/ TRIM/240/B/SQ    16781 ECLIPSE/ TRIM/290/B/SQ

12677 AT9492 100 to 150mm duct adapter

### Product range



	ECLIPSE/240/WH/RD	ECLIPSE/290/WH/RD
<b>Order code</b>	16757	16758
<b>Barcode no.</b>	9336462167571	9336462167588

### Product specifications

<b>Voltage</b>	220-240V ~ 50Hz	220-240V ~ 50Hz
<b>IP rating</b>	IPX4	IPX4
<b>Exhaust</b>	30W ball bearing motor	35W ball bearing motor
<b>Fan type</b>	Centrifugal fan	Centrifugal fan
<b>Noise level</b>	42dB	45dB
<b>Outlet</b>	100mm	150mm
<b>Air extraction</b>	270m <sup>3</sup> /hr	350m <sup>3</sup> /hr
<b>Connection</b>	Flex & plug	Flex & plug

### Dimensions

Cut out size	Min. ceiling depth	Cut out size	Min. ceiling depth
Ø 240mm	220mm	Ø 290mm	220mm





Return to base warranty



TRI-CCT luminaire



Quiet operation <45dB



Find out more

## Eclipse

Keep your air fresh and healthy with the Eclipse ducted exhaust fan with LED light. Supplied with flex and plug for DIY installation, the Eclipse also has square fascia options available.

### Product features

- Powerful ball bearing motor for superior reliability
- Tri-CCT LED panel provides energy-efficient illumination
- Enjoy quiet operation
- Supplied with separate 0.9m flex and plug for fan and light for easy DIY installation
- 3-year return to base warranty for peace of mind

### Accessories



16782 ECLIPSE/ TRIM/240/LT/WH/SQ



16783 ECLIPSE/ TRIM/290/LT/WH/SQ

12677 AT9492 100 to 150mm duct adapter

### Product range



	ECLIPSE/240/LT/WH/RD	ECLIPSE/290/LT/WH/RD
Order code	16759	16760
Barcode no.	9336462167595	9336462167601

### Product specifications

Voltage	220-240V ~ 50Hz	220-240V ~ 50Hz
IP rating	IPX4	IPX4
Exhaust	30W ball bearing motor	35W ball bearing motor
Fan type	Centrifugal fan	Centrifugal fan
Noise level	42dB	45dB
Outlet	100mm	150mm
Air extraction	270m <sup>3</sup> /hr	350m <sup>3</sup> /hr
Connection	Separate flex & plug for fan & light	Separate flex & plug for fan & light
Light	12W LED panel	18W LED panel
Lumens	900lm, 1000lm, 900lm	1300lm, 1500lm, 1300lm
CCT	3000K, 4000K, 5000K	3000K, 4000K, 5000K
Beam angle	120°	120°
CRI	>80	>80
LED Lifetime	54,000hr	54,000hr

### Dimensions

Cut out size	Min. ceiling depth	Cut out size	Min. ceiling depth
Ø 240mm	220mm	Ø 290mm	220mm





Return to base warranty



High velocity



TRI-CCT luminaire



Find out more

## Gust

Providing impressive extraction in a modern design, the Gust ducted high velocity exhaust fan is perfect for larger bathrooms. Behind the easy to clean fascia, a powerful 65W ball bearing motor maintains airflow over longer ducting runs.

### Product features

- High velocity airflow providing 640m<sup>3</sup>/hr extraction
- Enjoy quiet operation at just 45dB
- Draught stopper for improved energy efficiency
- Supplied with 0.9m flex and plug for easy DIY installation
- 3-year return to base warranty for peace of mind

### Product range





	GUST/295/WH/RD	GUST/295/LT/WH/RD
<b>Order code</b>	16763	16764
<b>Barcode no.</b>	9336462167632	9336462167649

### Product specifications

<b>Voltage</b>	220-240V ~ 50Hz	220-240V ~ 50Hz
<b>IP rating</b>	IPX4	IPX4
<b>Exhaust</b>	65W ball bearing motor	65W ball bearing motor
<b>Fan type</b>	Centrifugal fan	Centrifugal fan
<b>Noise level</b>	45dB	45dB
<b>Outlet</b>	150mm	150mm
<b>Air extraction</b>	640m <sup>3</sup> /hr	640m <sup>3</sup> /hr
<b>Connection</b>	Flex & plug	Separate flex & plug for fan & light
<b>Light</b>	-	18W LED panel
<b>Lumens</b>	-	1600lm, 1700lm, 1650lm
<b>CCT</b>	-	3000K, 4000K, 5000K
<b>Beam angle</b>	-	120°
<b>CRI</b>	-	>80
<b>LED Lifetime</b>	-	>60,000hr
<b>Colour</b>	Matte white	Matte white

### Dimensions

Cut out size	Min. ceiling depth	Cut out size	Min. ceiling depth
Ø 295mm	240mm	Ø 295mm	240mm







**3YR**  
Return to base warranty



**Airflow**  
High velocity



**Quiet operation**  
<36dB

## Proton

The Proton high velocity exhaust fan is a powerful and energy-efficient solution for small-medium bathrooms and ensuites. It features a super-quiet axial fan that provides high air extraction.

### Product features

- Powerful motor providing high velocity extraction
- Includes vent flaps for improved energy efficiency
- Supplied with 0.9m flex and plug for easy DIY installation
- 3-year return to base warranty for peace of mind



Find out more

### Product range


	PROTON/200/WH	PROTON/250/WH
<b>Order code</b>	16765	16766
<b>Barcode no.</b>	9336462167656	9336462167663

### Product specifications

<b>Voltage</b>	220-240V ~ 50Hz	220-240V ~ 50Hz
<b>Exhaust</b>	25W motor	32W motor
<b>Fan type</b>	Axial fan	Axial fan
<b>Noise level</b>	34dB	36dB
<b>Air extraction</b>	500m <sup>3</sup> /hr	750m <sup>3</sup> /hr
<b>Connection</b>	Flex & plug	Flex & plug
<b>Colour</b>	White	White

### Dimensions

Cut out size	Min. ceiling depth	Cut out size	Min. ceiling depth
Ø 240mm	215mm	Ø 295mm	260mm

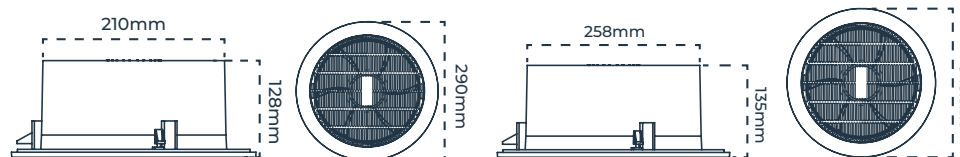



# Bathroom heaters

Turn your bathroom into an inviting sanctuary with an 3-in-1 heater, exhaust fan and LED light. Perfect for creating a **toasty haven** on those cold winter mornings, they deliver year-round **ventilation** to prevent pesky odours and condensation, and providing energy-efficient **illumination** – all in one discreet, modern package.

Thredbo.....	20
Buller.....	22
Buffalo .....	24
St Moritz.....	26
Venus.....	28



**In Home**  
warranty



**Instant**  
Infrared heat



**Motor**  
Powerful ball bearing motor



Find out more

## Thredbo

A 3-in-1 bathroom heater, exhaust fan and LED light, the Thredbo is a convenient solution for smaller bathrooms and ensuites, providing instant heat, high velocity airflow, and bright, efficient lighting.

### Product features

- 45W ball bearing motor for superior reliability
- Built-in 80°C thermal cutout switch for added safety
- Outlet grill with integrated draught stopper for maximum efficiency
- 3-year in-home warranty for peace of mind

### Accessories

18704 AT9707/ E27/WW - 8W R63 LED LAMP	18705 AT9707/ E27/CW - 8W R63 LED LAMP	18706 AT9708/ ES/WW - 10W R80 LED LAMP	18707 AT9708/ ES/CW - 10W R80 LED LAMP	18708 AT9708/ ES/DL - 10W R80 LED LAMP	18716 AT9709/ ES/HEAT/275

### Product range

	THREDBO/2LT/WH	THREDBO/4LT/WH
<b>Order code</b>	16767	16768
<b>Included accessories</b>	<ul style="list-style-type: none"> <li>• 3-gang wall plate</li> <li>• 1.5m length of 100mm duct</li> <li>• Outlet grill with duct clamp</li> <li>• 2 x 275W IR heat lamps</li> </ul>	<ul style="list-style-type: none"> <li>• 4-gang wall plate</li> <li>• 1.5m length of 100 mm duct</li> <li>• Outlet grill with duct clamp</li> <li>• 4 x 275W IR heat lamps</li> </ul>
<b>Barcode no.</b>	9336462167670	9336462167687

### Product specifications

<b>Voltage</b>	220-240V ~ 50Hz	220-240V ~ 50Hz
<b>IP rating</b>	IPX2	IPX2
<b>Heat</b>	2x 275W IR heat lamps	4x 275W IR heat lamps
<b>Exhaust</b>	45W ball bearing motor	45W ball bearing motor
<b>Fan type</b>	Centrifugal fan	Centrifugal fan
<b>Noise level</b>	45dB	45dB
<b>Outlet</b>	100mm	100mm
<b>Air extraction</b>	280m <sup>3</sup> /hr	280m <sup>3</sup> /hr
<b>Connection</b>	Terminal block	Terminal block
<b>Light</b>	8W R63 E27 lamp	12W R80 E27 lamp
<b>Lumens</b>	850lm	1250lm
<b>CCT</b>	4000K	4000K
<b>Beam angle</b>	120°	120°
<b>CRI</b>	>80	>80
<b>LED Lifetime</b>	15,000hr	15,000hr

### Dimensions

Cut out size	Min. ceiling depth	Cut out size	Min. ceiling depth
345x202mm	220mm	295x295mm	220mm





**In Home**  
warranty



**Quiet**  
operation  
42dB



**TRI-CCT**  
luminaire



Find out more

## Buller

The Buller provides heating, ventilation and illumination in an energy-efficient design. With instant infrared heating, efficient extraction and illumination, the Buller is ideal for medium sized bathrooms and ensuites.

### Product features

- 45W ball bearing motor for superior reliability
- Quality integrated tri-CCT LED downlight provides efficient illumination
- Infrared heat lamps provide instant heat
- Built-in 80°C thermal cutout switch for added safety
- 3-year in-home warranty for peace of mind

### Accessories



18716 AT9709/  
ES/HEAT/275

### Product range


	BULLER/2LT/WH	BULLER/4LT/WH
<b>Order code</b>	16769	16770
<b>Included accessories</b>	<ul style="list-style-type: none"> <li>• 3-gang wall plate</li> <li>• 1.5m length of 125mm duct</li> <li>• Outlet grill with duct clamp</li> <li>• 2 x 275W IR heat lamps</li> </ul>	<ul style="list-style-type: none"> <li>• 4-gang wall plate</li> <li>• 1.5m length of 125mm duct</li> <li>• Outlet grill with duct clamp</li> <li>• 4 x 275W IR heat lamps</li> </ul>
<b>Barcode no.</b>	9336462167694	9336462167700

### Product specifications

<b>Voltage</b>	220-240V ~ 50Hz	220-240V ~ 50Hz
<b>IP rating</b>	IPX4	IPX4
<b>Heat</b>	2x 275W IR heat lamps	4x 275W IR heat lamps
<b>Exhaust</b>	45W ball bearing motor	45W ball bearing motor
<b>Fan type</b>	Centrifugal fan	Centrifugal fan
<b>Noise level</b>	42dB	42dB
<b>Outlet</b>	125mm	125mm
<b>Air extraction</b>	305m <sup>3</sup> /hr	305m <sup>3</sup> /hr
<b>Connection</b>	Terminal block	Terminal block
<b>Light</b>	10W LED downlight	10W LED downlight
<b>Lumens</b>	880lm, 1000lm, 900lm	880lm, 1000lm, 900lm
<b>CCT</b>	3000K, 4000K, 5000K	3000K, 4000K, 5000K
<b>Beam angle</b>	120°	120°
<b>CRI</b>	>80	>80
<b>LED Lifetime</b>	>60,000hr	>60,000hr

### Dimensions

Cut out size	Min. ceiling depth	Cut out size	Min. ceiling depth
375x202mm	250mm	320x320mm	250mm

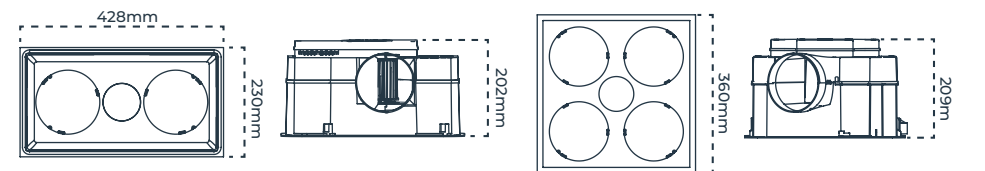



**In Home**  
warranty



**Airflow**  
400m<sup>3</sup>/hr



**TRI-CCT**  
luminaire



Find out more

## Buffalo

The Buffalo is a stylish and energy-efficient solution, providing instant infrared heating, air extraction, and illumination all in one package. Featuring a super efficient motor and a quality integrated tri-color LED panel that provides bright and efficient lighting, it is suitable for larger bathrooms and ensuites.

### Product features

- 40W ball bearing motor for superior reliability
- Tri-CCT colour selectable LED panel provides efficient illumination
- Infrared heat lamps provide instant heat
- Built-in 80°C thermal cutout switch for added safety
- 3-year in-home warranty for peace of mind

### Accessories



18716 AT9709/  
ES/HEAT/275

### Product range


	BUFFALO/2LT/WH	BUFFALO/4LT/WH
<b>Order code</b>	16771	16772
<b>Included accessories</b>	<ul style="list-style-type: none"> <li>• 3-gang wall plate</li> <li>• 1.5m length of 150mm duct</li> <li>• Outlet grill with duct clamp</li> <li>• 2 x 275W IR heat lamps</li> </ul>	<ul style="list-style-type: none"> <li>• 4-gang wall plate</li> <li>• 1.5m length of 150mm duct</li> <li>• Outlet grill with duct clamp</li> <li>• 4 x 275W IR heat lamps</li> </ul>
<b>Barcode no.</b>	9336462167717	9336462167724

### Product specifications

<b>Voltage</b>	220-240V ~ 50Hz	220-240V ~ 50Hz
<b>IP rating</b>	IPX4	IPX4
<b>Heat</b>	2x 275W IR heat lamps	4x 275W IR heat lamps
<b>Exhaust</b>	40W ball bearing motor	40W ball bearing motor
<b>Fan type</b>	Centrifugal fan	Centrifugal fan
<b>Noise level</b>	45dB	45dB
<b>Outlet</b>	150mm	150mm
<b>Air extraction</b>	400m <sup>3</sup> /hr	400m <sup>3</sup> /hr
<b>Connection</b>	Terminal block	Terminal block
<b>Light</b>	12W LED panel	12W LED panel
<b>Lumens</b>	973lm, 1086lm, 1087lm	1020lm, 1120lm, 1420lm
<b>CCT</b>	3000K, 4000K, 5000K	3000K, 4000K, 5000K
<b>Beam angle</b>	120°	120°
<b>CRI</b>	>80	>80
<b>LED Lifetime</b>	>60,000hr	>60,000hr

### Dimensions

Cut out size	Min. ceiling depth	Cut out size	Min. ceiling depth
465x245mm	250mm	375x375mm	250mm

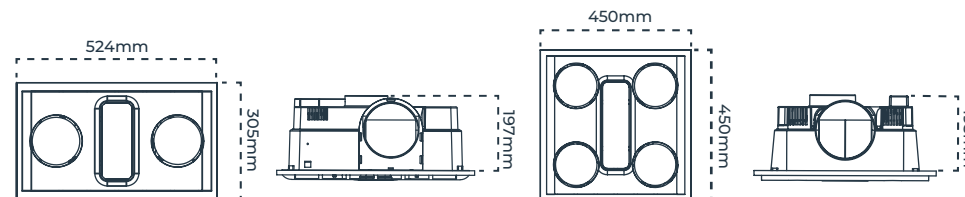



**In Home**  
warranty



**Instant**  
Infrared heat



**TRI-CCT**  
luminaire



Find out more

## St Moritz

The St Moritz 3-in-1 bathroom heater, exhaust fan, and LED light is a premium solution for larger bathrooms and ensuites. It features a sleek and low-profile fascia, instant infrared heating capabilities, high velocity exhaust, and integrated LED lighting.

### Product features

- Powerful 65W ball bearing motor for superior reliability
- Infrared tube provides instant heat
- Built-in 80°C thermal cutout switch for added safety
- Outlet grill with integrated draught stopper for maximum efficiency
- 3-year in-home warranty for peace of mind

### Accessories

**10361** AT9491 1000W R7S IR heat tube

### Product range


STMORITZ/WH	
<b>Order code</b>	16773
<b>Included accessories</b>	<ul style="list-style-type: none"> <li>• 3-gang wall plate</li> <li>• 1.5m length of 150mm duct</li> <li>• Outlet grill with duct clamp</li> </ul>
<b>Barcode no.</b>	9336462167731

### Product specifications

<b>Voltage</b>	220-240V ~ 50Hz
<b>IP rating</b>	IPX2
<b>Heat</b>	1000W R7S IR tube
<b>LED lifetime</b>	54,000hr
<b>Exhaust</b>	65W ball bearing motor
<b>Fan type</b>	Centrifugal fan
<b>Noise level</b>	45dB
<b>Outlet</b>	150mm
<b>Air extraction</b>	500m <sup>3</sup> /hr
<b>Connection</b>	Terminal block
<b>Light</b>	20W LED
<b>Lumens</b>	1585lm, 1695lm, 1585lm
<b>CCT</b>	3000K, 4000K, 5000K
<b>Beam angle</b>	120°
<b>CRI</b>	>80
<b>LED Lifetime</b>	54,000hr

### Dimensions

Cut out size	Min. ceiling depth
325x470mm	220mm

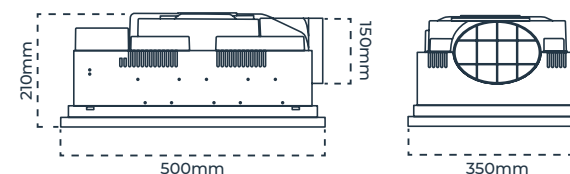



## Venus

Elevate the look and feel of your bathroom with the Venus: a 3-in-1 bathroom heater, exhaust fan and LED light. With quality, integrated LED panels, it has a low-profile fascia and provides superior heating via the instant infrared element.



**In Home**  
warranty



**Airflow**  
550m<sup>3</sup>/hr



**TRI-CCT**  
luminaire



Find out more

### Product features

- Powerful 65W ball bearing motor for superior reliability
- Infrared tube provides instant heat
- Built-in 80°C thermal cutout switch for added safety
- Outlet grill with integrated draught stopper for maximum efficiency
- 3-year in-home warranty for peace of mind

### Accessories

**10360 AT9490 800W Circular IR heat tube**

### Product range


VENUS/WH	
<b>Order code</b>	16775
<b>Included accessories</b>	<ul style="list-style-type: none"> <li>• 3-gang wall plate</li> <li>• 1.5m length of 150mm duct</li> <li>• Outlet grill with duct clamp</li> </ul>
<b>Barcode no.</b>	9336462167755

### Product specifications

<b>Voltage</b>	220-240V ~ 50Hz
<b>IP rating</b>	IPX2
<b>Heat</b>	800W circular IR tube
<b>LED lifetime</b>	54,000hr
<b>Exhaust</b>	65W ball bearing motor
<b>Fan type</b>	Centrifugal fan
<b>Noise level</b>	45dB
<b>Outlet</b>	150mm
<b>Air extraction</b>	550m <sup>3</sup> /hr
<b>Connection</b>	Terminal block
<b>Light</b>	18W LED panel
<b>Lumens</b>	1500lm
<b>CCT</b>	3000K, 4000K, 5000K
<b>Beam angle</b>	120°
<b>CRI</b>	>80
<b>LED Lifetime</b>	>54,000hr

### Dimensions

Cut out size	Min. ceiling depth
∅ 390mm	230mm

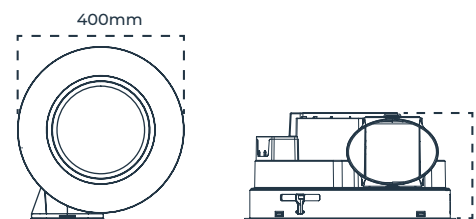

## Lamps

With a range of LED replacement lamps, Atom has you covered.



**18704** AT9707/  
E27/WW - 8W  
R63 LED LAMP



**18705** AT9707/  
E27/CW - 8W  
R63 LED LAMP



**18706** AT9708/  
ES/WW - 10W  
R80 LED LAMP



**18707** AT9708/  
ES/CW - 10W  
R80 LED LAMP



**18708** AT9708/  
ES/DL - 10W  
R80 LED LAMP



**18716** AT9709/  
ES/HEAT/275

SKU	Code	Thredbo	Buller	Buffalo
18704	AT9707/E27/WW - 8W R63 LED LAMP	●		
18705	AT9707/E27/CW - 8W R63 LED LAMP	●		
18706	AT9708/ES/WW - 10W R80 LED LAMP	●		
18707	AT9708/ES/CW - 10W R80 LED LAMP	●		
18708	AT9708/ES/DL - 10W R80 LED LAMP	●		
18716	AT9709/ES/HEAT/275	●	●	●

## Infrared heat tubes

Replacement infrared heat tubes for bathroom heaters.

SKU	Code	St Moritz	Venus
10360	AT9490/800W Circular IR heat tube		●
10361	AT9491/1000W R7S IR heat tube	●	

## Fascias


Change the look of your Eclipse exhaust fan with a range of interchangeable fascias.




**16776** ECLIPSE/  
TRIM/240/B/RD




**16777** ECLIPSE/  
TRIM/290/B/RD




**16780** ECLIPSE/  
TRIM/240/B/SQ




**16781** ECLIPSE/  
TRIM/290/B/SQ



**16778** ECLIPSE/  
TRIM/240/WH/SQ



**16779** ECLIPSE/  
TRIM/290/WH/SQ



**16782** ECLIPSE/  
TRIM/240/LT/WH/SQ



**16783** ECLIPSE/  
TRIM/290/LT/WH/SQ

SKU	Code	Eclipse		Eclipse with light	
		240	290	240	290
16776	ECLIPSE/TRIM/240/B/RD	●			
16777	ECLIPSE/TRIM/290/B/RD		●		
16780	ECLIPSE/TRIM/240/B/SQ	●			
16781	ECLIPSE/TRIM/290/B/SQ		●		
16778	ECLIPSE/TRIM/240/WH/SQ	●			
16779	ECLIPSE/TRIM/290/WH/SQ		●		
16782	ECLIPSE/TRIM/240/LT/WH/SQ			●	
16783	ECLIPSE/TRIM/290/LT/WH/SQ				●

## Duct adapters

Ensure your new exhaust is compatible with existing ceiling ducting.

SKU	Code	Eclipse		Eclipse with light	
		240	290	240	290
12677	AT9492 100-150MM DUCT ADAPTER	●		●	



## Selection Guide

### Exhaust Fans

Product name	Motor power (W)	Airflow specs (m <sup>3</sup> /hr)	Area suitability (m <sup>2</sup> *)	Decibel rating (dB)	Light power (W)	Lumens (lm)	CCT	CRI	LED lifetime (hr)	IP rating	Panel size (mm)	Colour	Cut out size (mm)	Min clearance required above unit (mm)	Min ceiling depth (mm)
ECLIPSE/240/WH/RD	35	270	7	42	-	-	-	-	-	IPX4	Ø265	Matte white	Ø240	65	220
ECLIPSE/290/WH/RD	40	350	8	45	-	-	-	-	-	IPX4	Ø320	Matte white	Ø290	65	220
ECLIPSE/240/LT/WH/RD	35	270	7	42	12	900, 1000, 900	3000K, 4000K, 5000K	>80	54,000	IPX4	Ø265	Matte white	Ø240	65	220
ECLIPSE/290/LT/WH/RD	40	350	8	45	18	1300, 1500, 1300	3000K, 4000K, 5000K	>80	54,000	IPX4	Ø320	Matte white	Ø290	65	220
GUST/295/WH/RD	65	640	12	45	-	-	-	-	-	IPX4	Ø320	Matte white	Ø295	65	240
GUST/295/LT/WH/RD	65	500	12	45	18	1600, 1700, 1650	3000K, 4000K, 5000K	>80	>60,000	IPX4	Ø320	Matte white	Ø295	65	240
PROTON/200/WH	25	500	13	34	-	-	-	-	-	IPX2	Ø290	White	Ø240	25	215
PROTON/250/WH	32	750	16	36	-	-	-	-	-	IPX2	Ø345	White	Ø295	32	260

### Bathroom Heaters

Product name	Heater power (W)	Motor power (W)	Airflow specs (m <sup>3</sup> /hr)	Area suitability (m <sup>2</sup> *)	Decibel rating (dB)	Light power (W)	Lumens (lm)	CCT	CRI	Light source	LED lifetime (hr)	IP rating	Panel size (mm)	Cut out size (mm)	Min clearance required above unit (mm)	Min ceiling depth (mm)
THREDBO/2LT/WH	2x275	45	280	8	45	8	850	4000K	>80	R63 E27 lamp	15,000	IPX2	420x245	345x202	40	220
THREDBO/4LT/WH	4x275	45	280	8	45	12	1250	4000K	>80	R80 E27 lamp	15,000	IPX2	370x370	295x295	40	220
BULLER/2LT/WH	2x275	45	305	8	42	10	850, 1000, 900	3000K, 4000K, 5000K	>80	LED downlight	>60,000	IPX4	428x230	375x202	48	250
BULLER/4LT/WH	4x275	45	305	8	42	10	850, 1000, 900	3000K, 4000K, 5000K	>80	LED downlight	>60,000	IPX4	360x360	320x320	41	250
BUFFALO/2LT/WH	2x275	40	400	9	45	12	973, 1086, 1087	3000K, 4000K, 5000K	>80	LED panel	>60,000	IPX4	524x305	465x245	53	250
BUFFALO/4LT/WH	4x275	40	400	9	45	12	1020, 1120, 1420	3000K, 4000K, 5000K	>80	LED panel	>60,000	IPX4	450x450	375x375	57	250
STMORITZ/WH	1000	65	500	13	45	20	1585, 1695, 1585	3000K, 4000K, 5000K	>80	LED	54,000	IPX2	500x350	325x470	20	220
VENUS/WH	800	65	550	13	45	18	1500	3000K, 4000K, 5000K	>80	LED	54,000	IPX2	Ø400	Ø390	10	230

\*Calculated based on 2.4m ceiling

## Frequently Asked Questions

### Where is the best position to install the bathroom heater?

The bathroom heater is best installed close to the bath or shower because it is designed to primarily provide heat for the immediate area underneath it, not the whole room.

Please consult AS/NZS 3000 (Section 6: Damp Situations) for correct installation.

### Where is the best position to install the exhaust fan?

The exhaust fan is best positioned as close as possible to the shower and away from windows or doors to create cross-ventilation.

Please consult AS/NZS 3000 (Section 6: Damp Situations) for correct installation.

### Can I put 375W heat lamps into my heater to generate more heat?

Please consult the product label for the maximum wattage heat lamps usable in each product.

### Can I operate the heat lamps without the exhaust fan?

The exhaust fan will automatically turn on to maintain a safe operating environment. It will only operate as long as is necessary.

### Why is the exhaust fan not clearing all of the steam from my bathroom?

The exhaust fan will not function efficiently unless there is a sufficient source of replacement air, such as a gap under the door and/or an open window.

### Can I have the switch plate installed horizontally?

Yes, our switch mechanisms are supplied separately so that the installing electrician can install the switch plate horizontally or vertically.



### Can I use another switch plate to match the rest of my house?

Yes, the installing electrician can use a different switch plate as long as it is mains-rated.

Known for our **affordable quality** products, Atom's diverse range offers solutions for every application, inside and out – from downlights, globes and strip lighting, to exterior spots, oysters and more.



Find out more

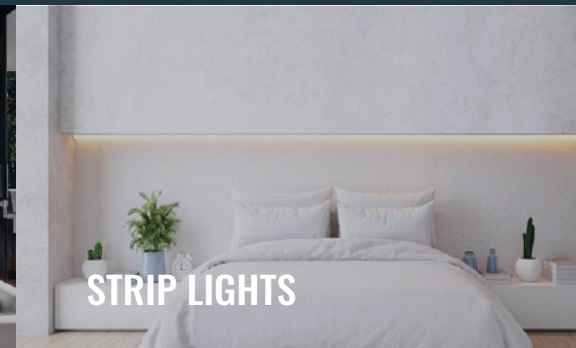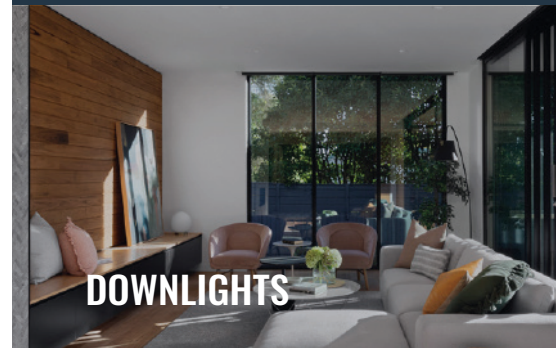

atom'air

Due to changes in industry standards and Atom's policy of continual product development, product specifications are subject to change without notice. Images are for illustrative purpose only. E&OE.  
For more information, please visit our website.

PO Box 271  
Kingsgrove NSW 1480  
sales@evolt.com.au  
1300 438 658  
evolt.com.au

© Evolt February, 2023

evolt