

## AT9014

4.5W LED adjustable downlight with driver



### MECHANICAL

<b>Adjustability</b>	Adjustable
<b>Body Material</b>	Aluminium
<b>Diffuser Material</b>	PMMA
<b>Product Finish</b>	Powdercoated
<b>Fitting Colour</b>	White
<b>IC Rating</b>	IC
<b>Installation Type</b>	Recessed
<b>IP Rating</b>	IP20

### ELECTRICAL

<b>Electrical Rating (Class)</b>	2
<b>Input Frequency (Hz)</b>	50
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage (W)</b>	4.5
<b>Switch Type</b>	Inline
<b>Working Temp Range (C)</b>	-20 to 50

### LAMP

<b>Beam Angle (Deg)</b>	45
<b>CCT Configuration</b>	Single
<b>CRI</b>	>80
<b>LED Type</b>	Diffused
<b>Maximum Bulb Wattage (W)</b>	2.24
<b>Number of Lamps</b>	1

### COLOUR TEMPERATURE

<b>CCT (K)</b>	
<b>AT9014/WH/CW</b>	4000
<b>AT9014/WH/WW</b>	3000
<b>CCT Colour</b>	
<b>AT9014/WH/CW</b>	Cool White
<b>AT9014/WH/WW</b>	Warm White
<b>LED Wattage (W)</b>	2.24
<b>System Lumens (L)</b>	
<b>AT9014/WH/CW</b>	190
<b>AT9014/WH/WW</b>	160

## DRIVER

Dimmable	No
Driver Included	Yes
Integrated Driver	No
Driver Type	Fixed output
Wiring Type	Re-wireable Flex & Plug (2 pin)

## COMPLIANCE

Standards	AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15
-----------	--

## WARRANTY

Commercial Use Warranty	3 (Yr) RTB
Domestic Use Warranty	3 (Yr) RTB

## DIMENSIONS


Cutout (mm)	46
Product Diameter(mm)	56
Product Height (mm)	
<b>AT9014/WH/CW</b>	56
<b>AT9014/WH/WW</b>	48

## Ordering Information

Order code	Item Code	Description
10632	<b>AT9014/WH/CW</b>	3w LED Adjustable Downlight 45o beam - Cool White - White Finish c/w Driver
10279	<b>AT9014/WH/WW</b>	3w LED Adjustable Downlight 45o beam - Warm White - White Finish c/w Driver


## Line Drawings

### AT9014



## Photometrics

AT9014/WH/CW

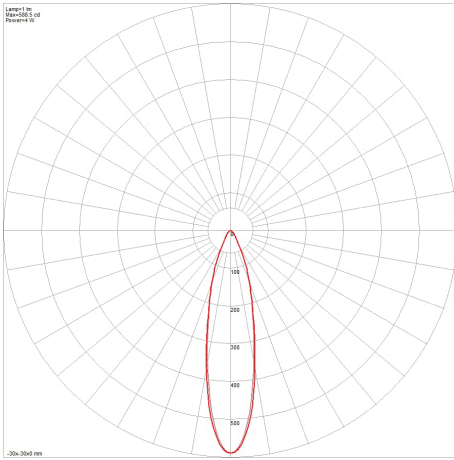

AT9014/WH/WW

