

AMBIENCE IN MUTION

Exhaust Fans and Bathroom Heaters



Ambience in motion

Bring a peaceful ambience to your bathroom, laundry, or ensuite with the Atom Air range of **exhaust fans** and **bathroom heaters**.

These **stylish** powerhouses deliver **efficient** extraction, making sure it's hot air and not energy bills going through the roof.









Warranty

Buy with confidence, knowing you are covered by Atom's comprehensive warranty.

We provide a leading **3-year** replacement warranty on the entire range of Atom Air **exhaust fans**.

For homeowners, bathroom heaters have a **3-year in-home warranty** to cover an electrician in the event of a product fault.



Choosing an exhaust fan

Without proper ventilation, moisture and mould can build up, leading to extra cleaning, maintenance, and potential long-term health problems. Unchecked, this can cause structural damage to the property.

Size matters

Choosing a fan with sufficient airflow is crucial to handle the steam in your bathroom. Calculate the room's volume (height x width x length) and consider the number of air changes per hour required.

We recommend 10 air changes per hour for an ensuite or laundry, and 15 for a full bathroom with a shower.

We have done the hard work for you, please refer to the Area suitability (m²) figures on page 52.





Adequate ventilation

For the exhaust fan to function effectively, an equal volume of replacement air must be able to enter the room; the fan will not function efficiently in an airtight room.

This is generally via on open window, vent or drawn under the door. Choose an exhaust fan that has a draught stopper and ensure that the ducting is properly sealed to prevent air from leaking back into the bathroom.

Location, location, location

For best results in removing moisture, the exhaust fan should be positioned as close as possible to the source of the moisture and away from any source of replacement air. Placing the exhaust away from doors or windows creates cross-ventilation, ensuring that it can effectively service the entire room.

For best results, we do not recommend placing exhaust fans and bathroom heaters directly above shower recesses. Please refer to AS/NZS 3000 in relation to individual models for further information on wet zone requirements when locating exhausts or bathroom heaters close to, or above showers and other wet zones.





Ducting

Building regulations require exhaust fans to be ducted outside, not into a ceiling or wall cavity. Keep duct runs short and straight for optimal performance. Excessive bends reduce efficiency.

Other factors to consider

There are several factors that might suggest you require a more powerful exhaust fan.

- High ceilings require more powerful fans due to the larger air volume and distance from the moisture source.
- · Open showers disperse more steam, needing a stronger fan.
- · High humidity levels can increase the amount of moisture in the air and slow down air movement, further hindering the efficiency of the exhaust fan.



Exhaust fans

Exhaust fans are integral in bathrooms and ensuites for removing moisture and smells, maintaining a pleasant environment.

Powered by **energy-efficient** motors, most Atom Air exhausts are supplied with a flex and plug for **easy installation**, though some models require hardwiring.

Azzure	10
Eclipse	12
Gust	16
Proton	2C





Return to base warranty



Ball bearing motor



Quiet operation <42dB

AZZURE

Keep your air fresh and healthy with the Azzure ducted exhaust fan. The Azzure features an easy-to-clean matte white fascia, with square and black options available. This model is hardwired and includes a run-on timer to meet the NCC building code update.

Product features


- · Built in run-on timer to meet NCC building codes
- · Powerful ball bearing motor for superior reliability
- · Draught stopper for improved energy efficiency
- · Enjoy quiet operation
- · 3-year return to base warranty for peace of mind

Accessories

16776 ECLIPSE/TRIM/240/B/RD fascia **16778** ECLIPSE/TRIM/240/WH/SQ fascia **16780** ECLIPSE/TRIM/240/B/SQ fascia **12677** AT9492 100 to 150mm duct adapter

Code	Description
AZZURE/240/WH/RD SKU: 14843	240mm 30W ducted exhaust fan with round white fascia and run-on timer

Voltage	220-240V~50Hz
IP Rating	IPX4
Timer range	1-25m
Fan type	Centrifugal fan
Connection	Terminal block
Exhaust	30W ball bearing motor
Noise level	42dB
Outlet	100mm
Air Extraction	270m³/hr
Cutout	Ø240mm
Min. ceiling depth	220mm
Warranty	3 years









Return to base warranty

ECLIPSE

Keep your air fresh and healthy with the Eclipse ducted exhaust fan. Supplied with flex and plug for DIY installation, the Eclipse has an easy to clean matte white fascia, with square and black options also available.



Easy install



Product features


- $\cdot\,$ Powerful ball bearing motor for superior reliability
- · Draught stopper for improved energy efficiency
- · Enjoy quiet operation
- · Supplied with 0.9m flex and plug for easy installation
- · 3-year return to base warranty for peace of mind

Accessories

16776 ECLIPSE/TRIM/240/B/RD fascia 16777 ECLIPSE/TRIM/290/B/RD fascia 16778 ECLIPSE/TRIM/240/WH/SQ fascia 16779 ECLIPSE/TRIM/290/WH/SQ fascia 16780 ECLIPSE/TRIM/240/B/SQ fascia **16781** ECLIPSE/TRIM/290/B/SQ fascia **12677** AT9492 100 to 125mm duct adapter **14851** TIMER/RO 1-25min run-on timer

Code	Description
ECLIPSE/240/WH/RD SKU: 16757	240mm 30W ducted exhaust fan with round white fascia
ECLIPSE/290/WH/RD SKU: 16758	290mm 35W ducted exhaust fan with round white fascia
ECLIPSE/240/WH/SQ SKU: 16784	240mm 30W ducted exhaust fan with square white fascia
ECLIPSE/290/WH/SQ SKU: 16785	290mm 35W ducted exhaust fan with square white fascia

Voltage	220-240V~50Hz	
IP Rating	IPX4	
Fan type	Centrifugal fan	
Connection	Flex & plug	
Flex & plug length	900mm	
Warranty	3 years	
	ECLIPSE/240	ECLIPSE/290
Exhaust	30W ball bearing motor	35W ball bearing motor
Noise level	42dB	45dB
Outlet	100mm	150mm
Air Extraction	270m³/hr	350m³/hr
Cutout	Ø240mm	Ø290mm
Min. ceiling depth	220mm	220mm









Return to base warranty



TRI-CCT luminaire

Quiet operation <45dB

ECLIPSE/LT

Keep your air fresh and healthy with the Eclipse ducted exhaust fan with LED light. Supplied with flex and plug for DIY installation, the Eclipse also has square fascia options available.

Product features


- · Powerful ball bearing motor for superior reliability
- · Tri-CCT LED panel provides energy-efficient illumination
- · Enjoy quiet operation
- · Supplied with separate 0.9m flex and plug for fan and light for easy installation
- · 3-year return to base warranty for peace of mind


Accessories

16782 ECLIPSE/TRIM/240/LT/WH/SQ fascia 16783 ECLIPSE/TRIM/290/LT/WH/SO fascia 12677 AT9492 100 to 125mm duct adapter 14851 TIMER/RO 1-25min run-on timer

Code	Description
ECLIPSE/240/LT/WH/RD SKU: 16759	240mm 30W ducted exhaust fan with round white fascia and LED panel - Tri-Colour
ECLIPSE/290/LT/WH/RD SKU: 16760	290mm 35W ducted exhaust fan with round white fascia and LED panel - Tri-Colour

Voltage	220-240V~50Hz	
Light colour options	Tri-Colour 🕦	
Colour temperature	3000K, 4000K, 5000K	
IP Rating	IPX4	
Fan type	Centrifugal fan	
Connection	2x Flex & plug	
Flex & plug length	900mm	
Warranty	3 years	
	ECLIPSE/240/WH/RD	ECLIPSE/290/WH/RD
Exhaust	30W ball bearing motor	35W ball bearing motor
Light	12W LED panel	18W LED panel
Lumen output	900lm, 1000lm, 900lm	1300lm, 1500lm, 1300lm
Noise level	42dB	45dB
Outlet	100mm	150mm
Air Extraction	270m³/hr	350m³/hr
Cutout	Ø240mm	Ø290mm
Min. ceiling depth	220mm	220mm











Return to base warranty



Airflow High velocity



Quiet operation <45dB **GUST**

Providing impressive extraction in a modern design, the Gust ducted high velocity exhaust fan is perfect for larger bathrooms. Behind the easy to clean fascia, a powerful ball bearing motor maintains airflow over longer ducting runs.


Product features


- · High velocity airflow
- · Enjoy quiet operation
- · Draught stopper for improved energy efficiency
- · Supplied with 0.9m flex and plug for easy installation
- · 3-year return to base warranty for peace of mind

Accessories

Code	Description
GUST/240/WH/RD SKU: 15558	240mm 35W ducted exhaust fan with round white fascia
GUST/295/WH/RD SKU: 16763	295mm 65W ducted exhaust fan with round white fascia

_		
Voltage	220-240V~50Hz	
IP Rating	IPX4	
Fan type	Centrifugal fan	
Connection	Flex & plug	
Flex & plug length	900mm	
Warranty	3 years	
	GUST/240	GUST/295
Exhaust	35W ball bearing motor	65W ball bearing motor
Noise level	41dB	45dB
Outlet	125mm	150mm
Air Extraction	330m³/hr	640m³/hr
Cutout	Ø240mm	Ø295mm
Min. ceiling depth	200mm	240mm









Return to base warranty



High velocity



GUST/LT

Providing impressive extraction in a modern design, the Gust ducted high-velocity exhaust fan is perfect for larger bathrooms and toilets. Featuring a powerful 65W ball bearing motor, it maintains airflow over longer ducting runs and includes an integrated LED light for bright illumination.


Product features

- · Tri-CCT LED light
- · Enjoy quiet operation at just 45dB
- · Draught stopper for improved energy efficiency
- · Supplied with 0.9m flex and plug for easy installation
- · 3-year return to base warranty for peace of mind

Accessories

Code	Description
GUST/295/LT/WH/RD	295mm 65W Ducted exhaust fan with round
SKU: 16764	white fascia and LED panel - Tri-Colour

Voltage	220-240V~50Hz
Light colour options	Tri-Colour 🔥
Colour temperature	3000K, 4000K, 5000K
Lumen output	1600lm, 1700lm, 1650lm
IP Rating	IPX4
Fan type	Centrifugal fan
Connection	2x Flex & plug
Flex & plug length	900mm
Exhaust	65W ball bearing motor
Light	18W LED panel
Noise level	45dB
Outlet	150mm
Air Extraction	640m³/hr
Cutout	Ø295mm
Min. ceiling depth	240mm
Warranty	3 years









Return to base warranty

PROTON

The Proton high velocity exhaust fan is a powerful and energyefficient solution for small-medium bathrooms and ensuites. It features a super-quiet axial fan that provides high air extraction.

Airflow High velocity



Quiet operation <36dB


Product features

- · Powerful motor providing high velocity extraction
- · Includes vent flaps for improved energy efficiency
- · Supplied with 0.9m flex and plug for easy installation
- · 3-year return to base warranty for peace of mind

Accessories

Code	Description
PROTON/200/WH SKU: 16765	200mm 25W high velocity exhaust fan
PROTON/250/WH SKU: 16766	250mm 32W high velocity exhaust fan

Voltage	220-240V~50Hz	
Fan type	Axial fan	
Connection	Flex & plug	
Flex & plug length	900mm	
Warranty	3 years	
	PROTON/200/WH	PROTON/250/WH
Exhaust	25W motor	32W motor
Noise level	34dB	36dB
Air Extraction	500m³/hr	750m³/hr
Cutout	Ø240mm	Ø295mm
Min. ceiling depth	215mm	260mm





Bathroom heaters

Turn your bathroom into an inviting sanctuary with our range of bathroom heaters. Perfect for creating a warm haven on cold mornings, they provide year-round ventilation to prevent odours and condensation, along with energy-efficient illumination – all in one stylish, modern package.

Thredbo	
Buller	26
Buffalo	28
Alta	
Santorini	
St Moritz	34
Zurich	
Venus	40
Infraglow	42
InfraglowHeatspot	44





In Home warranty



Instant Infrared heat



Motor

Powerful ball
bearing motor

THREDBO

A 3-in-1 bathroom heater, exhaust fan and LED light, the Thredbo is a convenient solution for smaller bathrooms and ensuites, providing instant heat, high velocity airflow, and bright, efficient lighting.

Product features


- · 45W ball bearing motor for superior reliability
- · Built-in 80°C thermal cutout switch for added safety
- · Outlet grill with integrated draught stopper for maximum efficiency
- · 3-year in-home warranty for peace of mind


Accessories

18704 AT9707/E27/WW 8W R63 LED lamp 18705 AT9707/E27/CW 8W R63 LED lamp 18706 AT9708/ES/WW 10W R80 LED lamp 18707 AT9708/ES/CW 10W R80 LED lamp **18708** AT9708/ES/DL 10W R80 LED lamp **18716** AT9709/ES/HEAT/275 lamp **14851** TIMER/RO 1-25min run-on timer

Code	Description
THREDBO/2LT/WH	2 light 3-in-1 bathroom heater and exhaust
SKU: 16767	- Cool white
THREDBO/4LT/WH	4 light 3-in-1 bathroom heater and exhaust
SKU: 16768	- Cool white

Voltage	220-240V~50Hz	
Light colour options	Cool white	
Colour temperature	4000K	
Fan	Centrifugal fan	
Connection	Terminal block	
Exhaust	45W ball bearing motor	
Noise level	45dB	
Air Extraction	280m³/hr	
Outlet	125mm	
Warranty	3 years	
	THREDBO/2LT/WH	THREDBO/4LT/WH
Light	8W R63 E27 lamp	12W R80 E27 lamp
Lumen output	850lm	1250lm
Heat	2x 275W IR heat lamps	4x 275W IR heat lamps
Cutout	345x202mm	295x295mm
Min. ceiling depth	220mm	220mm











In Home warranty



42dB



BULLER

The Buller provides heating, ventilation and illumination in an energy-efficient design. With instant infrared heating, efficient extraction and illumination, the Buller is ideal for medium sized bathrooms and ensuites.

Product features


- · 45W ball bearing motor for superior reliability
- · Quality integrated Tri-CCT LED downlight provides efficient illumination
- · Infrared heat lamps provide instant heat
- · Built-in 80°C thermal cutout switch for added safety
- · 3-year in-home warranty for peace of mind


Accessories


18716 AT9709/ES/HEAT/275 lamp


Code	Description
BULLER/2LT/WH SKU: 16769	2 light 3-in-1 bathroom heater and exhaust with LED downlight - Tri-Colour
BULLER/4LT/WH SKU: 16770	4 light 3-in-1 bathroom heater and exhaust with LED downlight - Tri-Colour

•		
Voltage	220-240V~50Hz	
Light colour options	Tri-Colour 🅦	
Colour temperature	3000K, 4000K, 5000K	
Lumen output	880lm, 1000lm, 900lm	
Connection	Terminal block	
Fan	Centrifugal fan	
Exhaust	45W ball bearing motor	
Noise level	42dB	
Air Extraction	305m³/hr	
Outlet	125mm	
Light	10W LED downlight	
Warranty	3 years	
	BULLER/2LT/WH	BULLER/4LT/WH
Heat	2x 275W IR heat lamps	4x 275W IR heat lamps
Cutout	375x202mm	320x320mm
Min. ceiling depth	250mm	250mm

















BUFFALO

The Buffalo is a stylish and energy-efficient solution, providing instant infrared heating, air extraction, and illumination all in one package. Featuring a super efficient motor and a quality integrated tri-color LED panel that provides bright and efficient lighting, it is suitable for larger bathrooms and ensuites.

Product features


- · 40W ball bearing motor for superior reliability
- · Tri-CCT colour selectable LED panel provides efficient illumination
- · Infrared heat lamps provide instant heat
- · Built-in 80°C thermal cutout switch for added safety
- · 3-year in-home warranty for peace of mind

Accessories

18716 AT9709/ES/HEAT/275 lamp

Code	Description
BUFFALO/2LT/WH SKU: 16771	2 light 3-in-1 bathroom heater and exhaust with LED panel - Tri-Colour

Voltage	220-240V~50Hz
Light colour options	Tri-Colour 🔥
Colour temperature	3000K, 4000K, 5000K
Lumen output	975lm, 1090lm, 1080lm
Connection	Terminal block
Fan	Centrifugal fan
Exhaust	40W ball bearing motor
Noise level	45dB
Air Extraction	400m³/hr
Outlet	150mm
Light	12W
Heat	2x 275W IR heat lamps
Cutout	465x245mm
Min. ceiling depth	250mm
Warranty	3 years
	·

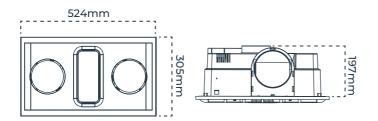







Experience optimal comfort with the Alta 3-in-1 unit, combining heating, ventilation, and LED lighting. Perfect for small to medium bathrooms, it features a sleek matte white finish and ensures a cosy, fresh bathroom environment.



Product features

- · Tri-CCT colour selectable LED panel provides efficient illumination
- · Infrared heat lamps provide instant heat
- · IPX2 rated safe for use in damp environments.

· 40W ball bearing motor for superior reliability

· 3-year in-home warranty for peace of mind




Accessories

18716 AT9709/ES/HEAT/275 lamp

Code	Description
ALTA/2LT/WH SKU: 14841	2 light high velocity bathroom heater and exhaust with LED panel - Tri-Colour

Voltage	220-240V~50Hz
Light colour options	Tri-Colour ರ
Colour temperature	3000K, 4000K, 5000K
Lumen output	850lm, 920lm, 910lm
Connection	Terminal block
Fan	Centrifugal fan
Exhaust	40W ball bearing motor
Noise level	47dB
Air Extraction	400m³/hr
Outlet	125mm
Light	12W
Heat	2x 275W IR heat lamps
Cutout	435x255mm
Min. ceiling depth	220mm
Warranty	3 years









PTC Heater



SANTORINI

Transform your bathroom to a destination with the Santorini.

Featuring an ultra-slim design, PTC heating, powerful ventilation, and bright LED lighting. Ideal for medium to large bathrooms, the Santorini combines functionality and style with year-round comfort.


Product features

- Premium 20W TRI-CCT colour selectable LED panel provides high lumen output
- PTC heater with two setting control 800W & 1500W (2000W combined)
- · Powerful 35W blower fan efficiently warms the entire room
- · 535 m³/hr 45W exhaust fan effectively controls steam and moisture
- · 3-year in-home warranty for peace of mind

Accessories

Code	Description
SANTORINI/WH	2000W PTC high velocity bathroom heater
SKU: 14834	& exhaust with LED panel - White
SANTORINI/B	2000W PTC high velocity bathroom heater
SKU: 14835	& exhaust with LED panel - Black

Voltage	220-240V~50Hz
Light colour options	Tri-Colour ^{TD}
Colour temperature	3000K, 4000K, 5000K
Lumen output	1300lm, 1450lm, 1350lm
Connection	Terminal block
Fan	35W centrifugal fan
Exhaust	45W ball bearing motor
Noise level	52dB
IP Rating	IPX2
Air Extraction	535m³/hr
Outlet	125mm
Light	20W LED panel
Heat	2000W PTC heater
Cutout	580x310mm
Min. ceiling depth	220mm
Warranty	3 years









Infrared heat tube



ST MORITZ

The St Moritz 3-in-1 bathroom heater, exhaust fan, and LED light is a premium solution for larger bathrooms and ensuites. It features a sleek and low-profile fascia, instant infrared heating capabilities, high velocity exhaust, and integrated LED lighting.

Product features


- · Powerful 70W ball bearing motor for superior reliability
- · Infrared tube provides instant heat
- · Built-in 80°C thermal cutout switch for added safety
- · 3-year in-home warranty for peace of mind


Accessories

10361 AT9491 1000W R7S IR heat tube

Code	Description
STMORITZ/WH SKU: 16773	1000W infrared high velocity bathroom heater and exhaust with LED panels - Tri-Colour - White
STMORITZ/B SKU: 14837	1000W infrared high velocity bathroom heater and exhaust with LED panels - Tri-Colour - Black

Voltage	220-240V~50Hz
Light colour options	Tri-Colour 🎨
Colour temperature	3000K, 4000K, 5000K
Lumen output	1585lm, 1700lm, 1585lm
Connection	Terminal block
Fan	Centrifugal fan
Exhaust	70W ball bearing motor
Noise level	45dB
Air Extraction	500m³/hr
Outlet	150mm
Light	20W LED panel
Heat	1000W R7S IR tube
Cutout	325x470mm
Min. ceiling depth	220mm
Warranty	3 years











Infrared heat tube



ST MORITZ SMALL

The compact St Moritz Small 3-in-1 bathroom heater, exhaust fan, and LED light is a premium solution for small to medium sized bathrooms and ensuites. It features a sleek and low-profile fascia, instant infrared heating capabilities, high velocity exhaust, and integrated LED lighting.

Product features


- · Powerful 70W ball bearing motor for superior reliability
- · Infrared tube provides instant heat
- · Built-in 80°C thermal cutout switch for added safety
- · 3-year in-home warranty for peace of mind

Accessories

10361 AT9491 1000W R7S IR heat tube

Code	Description	
STMORITZ/SML/WH SKU: 14838	1000W infrared high velocity compact bathroom heater and exhaust with LED panel - White - Tri-Colour	

Voltage	220-240V~50Hz
Light colour options	Tri-Colour 🍽
Colour temperature	3000K, 4000K, 5000K
Lumen output	700lm, 720lm, 710lm
Connection	Terminal block
Fan	Centrifugal fan
Exhaust	70W ball bearing motor
Noise level	45dB
Air Extraction	480m³/hr
Outlet	150mm
Light	10W LED panel
Heat	1000W R7S IR tube
Cutout	325x400mm
Min. ceiling depth	220mm
Warranty	3 years









ZURICH

The Zurich is perfect for small to medium bathrooms, offering PTC heating, powerful extraction, and bright LED lighting. Its efficient design ensures a comfortable and inviting environment with whisper-quiet operation and easy installation.



Airflow 310m³/hr



TRI-CCT luminaire

Product features


- · 35W ball bearing motor for superior reliability
- · 20W Tri-CCT LED provides adjustable lighting
- PTC heater with two setting control 1000W & 1000W (combined 2000W)
- · Electrician-friendly mount system simplifies setup
- · IPX2 rated safe for use in damp environments.

Accessories

14851 TIMER/RO 1-25min run-on timer

Code	Description	
ZURICH/WH	2000W PTC high velocity bathroom heater	
SKU: 14836	& exhaust with LED panel - White	

Voltage	220-240V~50Hz
Light colour options	Tri-Colour 🌓
Colour temperature	3000K, 4000K, 5000K
Lumen output	1200lm, 1300lm, 1200lm
Connection	Terminal block
Fan	35W Centrifugal fan
Exhaust	35W ball bearing motor
Noise level	<38dB
IP Rating	IPX2
Air Extraction	310m³/hr
Outlet	100mm
Light	20W LED panel
Heat	2000W PTC heater
Cutout	310x610mm
Min. ceiling depth	200mm
Warranty	3 years

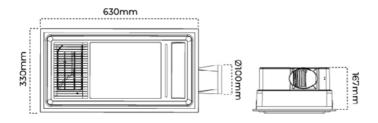







Airflow 550m³/hr



VENUS

Elevate the look and feel of your bathroom with the Venus: a 3-in-1 bathroom heater, exhaust fan and LED light. With quality, integrated LED panels, it has a low-profile fascia and provides superior heating via the instant infrared element.

Product features


- · Powerful 65W ball bearing motor for superior reliability
- · Infrared tube provides instant heat
- · Built-in 80°C thermal cutout switch for added safety
- · Outlet grill with integrated draught stopper for maximum efficiency
- · 3-year in-home warranty for peace of mind


Accessories

10360 AT9490/TUBE 800W IR heat tube 10370 AT9490/GLASS replacement panel 14851 TIMER/RO 1-25min run-on timer

Code	Description	
VENUS/WH SKU: 16775	800W circular infrared bathroom heater & exhaust with LED panel - Tri-Colour	

•	
Voltage	220-240V~50Hz
Light colour options	Tri-Colour 🍽
Colour temperature	3000K, 4000K, 5000K
Lumen output	1400lm, 1500lm, 1450lm
Fan type	Centrifugal fan
Connection	Terminal block
Exhaust	65W ball bearing motor
Noise level	45dB
Air Extraction	550m³/hr
Outlet	150mm
Light	24W LED panel
Heat	800W circular IR tube
Cutout	Ø390mm
Min. ceiling depth	230mm
Warranty	3 years











Infrared heat tube



INFRAGLOW


Introducing the Infraglow, a stylish bathroom heater with advanced infrared technology. This sleek unit provides rapid, direct heat, making it perfect for instant warmth. Ideal for modern bathrooms, it combines functionality with elegant design.

Product features

- · 1000W infrared heat lamps provide instant, powerful heat
- · Slim design enhances the aesthetic appeal of your bathroom
- · Steel housing ensures durability and longevity
- · Includes on/off heat switch
- · Includes round template cutout for easy installation.

Code	Description	
INFRAGLOW/WH	1000W radiant infrared bathroom heater -	
SKU: 14839	Round - White	

Voltage	220-240V~50Hz
Connection	Terminal block
IP Rating	IPX4
Heat	1000W circular IR tube
Cutout	Ø266mm
Min. ceiling depth	240mm
Warranty	3 years

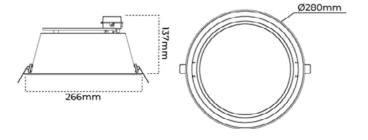









HEATSPOT

Enjoy the warmth and comfort of the Heatspot, a single heat lamp for ensuites and small bathrooms. This compact unit provides powerful, instant body warmth, with a durable design and matte white finish.

Product features


- · Infrared heat lamp provides instant heat
- · Perfect for ensuites and small bathrooms
- · Steel housing ensures durability and longevity
- · Easy to control and operate
- · Matte white finish Blends well with any bathroom décor

Accessories

18716 AT9709/ES/HEAT/275 lamp

Code	Description	
HEATSPOT/WH SKU: 14840	275W single R125 heat spot - White	

Voltage	220-240V~50Hz
Connection	Terminal block
IP Rating	IPX0
Heat	275W R125 Heat Lamp
Cutout	Ø160mm
Min. ceiling depth	290mm
Warranty	3 years





Accessories

Enhance and **customise** your Atom Air bathroom products with our wide range of accessories, including lamps, infrared tubes, duct adapters, timers, fascias, and replacement glass panels.

Our selection ensures your bathroom heaters and exhaust fans perform at their best and match your style preferences.

Timer	48
Other Accessories	50





TIMER

The Run-On Timer keeps your bathroom free of steam and odours after you leave. This fully adjustable timer fits most exhaust fans and integrates easily behind existing switch plates.

Product features

- · Allows you to set the exhaust fan to run for 1–25 minutes after leaving the room.
- · Fits within a wall-mounted switch plate or exhaust fan
- · Easy mount design with moulded fastening hole
- · Works with most exhaust fans on the market
- · Continues to eliminate steam and odours after you exit the bathroom

Product range

Code	Description	Suitable for
TIMER/RO SKU: 14851	1-25min run-on exhaust timer	All AC Exhaust Fans

NCC Building Code Update

The National Construction Code (NCC) 10.8.2 has been updated to improve ventilation standards in residential buildings. These changes ensure better air quality and moisture control in bathrooms and sanitary compartments. Here are the key points:

1. Minimum Flow Rates:

Bathrooms and sanitary compartments require a minimum flow rate of 25 L/s.

Kitchens or laundries require a minimum flow rate of 40 L/s.

2. Direct Discharge:

Exhaust systems in bathrooms and sanitary compartments must discharge air directly to the outside or via a duct.

3. Run-On Timer Requirement:

For exhaust systems not run continuously, serving bathrooms or sanitary compartments without natural ventilation, the system must:

- · Be interlocked with the room's light switch.
- Include a run-on timer to continue operation for 10 minutes after the light is turned off.

4. Make-Up Air:

Rooms with exhaust systems must have make-up air openings to an adjacent room or in accordance with AS 1668.2, ensuring proper air balance.

Atom Air is at the forefront of addressing these changes. Our new **Azzure** exhaust fan with an integrated run-on timer ensures compliance with the updated NCC requirements, providing continuous ventilation to eliminate steam and odours. Additionally, our **Run-On Timer accessory** is compatible with most AC exhaust fans, allowing easy upgrades for existing systems.

By incorporating these innovative solutions, Atom Air continues to set the standard in ventilation technology, ensuring optimal air quality and moisture control in modern homes.



Lamps

SKU	Code	Suitable for
18704	AT9707/E27/WW - 8W R63 LED lamp	THREDBO
18705	AT9707/E27/CW - 8W R63 LED lamp	THREDBO
18706	AT9708/ES/WW - 10W R80 LED lamp	THREDBO
18707	AT9708/ES/CW - 10W R80 LED lamp	THREDBO
18708	AT9708/ES/DL - 10W R80 LED lamp	THREDBO
18716	AT9709/ES/HEAT/275 lamp	THREDBO, BULLER, BUFFALO, HEATSPOT, ALTA

Infrared heat tubes

SKU	Code	Suitable for
10360	AT9490/TUBE 800W circular IR heat tube	ST MORITZ
10361	AT9491 1000W R7S IR heat tube	VENUS

Duct adapters

SKU	Code	Suitable for
12677	AT9492 125mm duct adapter	ECLIPSE, ECLIPSE/LT

Timers

SKU	Code	Suitable for
14851	TIMER/RO 1-25min run-on exhaust timer	All AC Exhaust Fans

Fascias



16776 ECLIPSE/ TRIM/240/B/RD



16777 ECLIPSE/ TRIM/290/B/RD



16780 ECLIPSE/ TRIM/240/B/SQ



16781 ECLIPSE/ TRIM/290/B/SQ



16778 ECLIPSE/ TRIM/240/WH/SQ



16779 ECLIPSE/ TRIM/290/WH/SQ



16782 ECLIPSE/ TRIM/240/LT/WH/SQ



16783 ECLIPSE/ TRIM/290/LT/WH/SQ

SKU	Code	Suitable for
16776	ECLIPSE/TRIM/240/B/RD fascia	ECLIPSE/240, AZZURE
16777	ECLIPSE/TRIM/290/B/RD fascia	ECLIPSE/290
16780	ECLIPSE/TRIM/240/B/SQ fascia	ECLIPSE/240, AZZURE
16781	ECLIPSE/TRIM/290/B/SQ fascia	ECLIPSE/290
16778	ECLIPSE/TRIM/240/WH/SQ fascia	ECLIPSE/240, AZZURE
16779	ECLIPSE/TRIM/290/WH/SQ fascia	ECLIPSE/290
16782	ECLIPSE/TRIM/240/LT/WH/SQ fascia	ECLIPSE/LT/240, AZZURE
16783	ECLIPSE/TRIM/290/LT/WH/SQ fascia	ECLIPSE/LT/290

Panels

SKU	Code	Suitable for
10370	AT9490/GLASS replacement glass panel	VENUS

Selection Guide

Exhaust Fans	Motor power (W)	Airflow specs (m³/hr)	Fan Type	Timer Included	Area suitability (m²)*	Decibel rating (dB)	Light power (W)	
AZZURE/240/WH/RD	30	270	Centrifugal	~	8	42	-	
ECLIPSE/240/WH/RD	30	270	Centrifugal		8	42	-	
ECLIPSE/240/WH/SQ	30	270	Centrifugal		8	42	-	
ECLIPSE/290/WH/RD	35	350	Centrifugal		10	45	-	
ECLIPSE/290/WH/SQ	35	350	Centrifugal		10	45	-	
ECLIPSE/240/LT/WH/RD	30	270	Centrifugal		8	42	12	
ECLIPSE/290/LT/WH/RD	35	350	Centrifugal		10	45	18	
GUST/240/WH/RD	35	330	Centrifugal		9	41	-	
GUST/295/WH/RD	65	640	Centrifugal		18	45	-	
GUST/295/LT/WH/RD	65	640	Centrifugal		18	45	18	
PROTON/200/WH	25	500	Axial		14	34	-	
PROTON/250/WH	32	750	Axial		21	36	-	

Heater power (W)	Motor power (W)	Airflow specs (m³/hr)	Fan Type	Area suitability (m²)*	Decibel rating (dB)	Light power (W)	
2x275	45	280	Centrifugal	8	45	8	
4x275	45	280	Centrifugal	8	45	12	
2x275	45	305	Centrifugal	8	42	10	
4x275	45	305	Centrifugal	8	42	10	
2x275	40	400	Centrifugal	11	45	12	
2x275	40	400	Centrifugal	11	47	12	
2000	45	535	Centrifugal	15	52	20	
2000	45	535	Centrifugal	15	52	20	
1000	70	500	Centrifugal	14	45	20	
1000	70	500	Centrifugal	14	45	20	
1000	70	480	Centrifugal	13	45	10	
2000	35	310	Centrifugal	9	38	20	
800	65	550	Centrifugal	15	45	24	
1000			-		-	-	
275	-	-	-	-	-	-	
	power (W) 2x275 4x275 2x275 4x275 2x275 2x275 2000 2000 1000 1000 2000 800 1000	power (W) power (W) 2x275 45 4x275 45 2x275 45 4x275 45 2x275 40 2x275 40 2000 45 2000 45 1000 70 1000 70 2000 35 800 65 1000 -	power (W) power (W) specs (m³/hr) 2x275 45 280 4x275 45 280 2x275 45 305 4x275 45 305 2x275 40 400 2x275 40 400 2000 45 535 2000 45 535 1000 70 500 1000 70 480 2000 35 310 800 65 550 1000 - -	power (W) power (W) specs (m³/hr) Fan Type 2x275 45 280 Centrifugal 4x275 45 280 Centrifugal 2x275 45 305 Centrifugal 2x275 40 400 Centrifugal 2x275 40 400 Centrifugal 2000 45 535 Centrifugal 2000 45 535 Centrifugal 1000 70 500 Centrifugal 1000 70 480 Centrifugal 2000 35 310 Centrifugal 800 65 550 Centrifugal 1000 - - -	power (W) power (W) specs (m³/hr) Fan Type suitability (m²)* 2x275 45 280 Centrifugal 8 4x275 45 280 Centrifugal 8 2x275 45 305 Centrifugal 8 4x275 45 305 Centrifugal 11 2x275 40 400 Centrifugal 11 2x275 40 400 Centrifugal 15 2000 45 535 Centrifugal 15 2000 45 535 Centrifugal 14 1000 70 500 Centrifugal 14 1000 70 480 Centrifugal 13 2000 35 310 Centrifugal 9 800 65 550 Centrifugal 15	power (W) power (W) specs (m³/hr) Fan Type suitability (m²)* rating (dB) 2x275 45 280 Centrifugal 8 45 4x275 45 280 Centrifugal 8 45 2x275 45 305 Centrifugal 8 42 4x275 45 305 Centrifugal 11 45 2x275 40 400 Centrifugal 11 47 2x275 40 400 Centrifugal 15 52 2000 45 535 Centrifugal 15 52 2000 45 535 Centrifugal 14 45 1000 70 500 Centrifugal 14 45 1000 70 480 Centrifugal 13 45 2000 35 310 Centrifugal 9 38 800 65 550 Centrifugal 15 45 1000	power (W) power (W) specs (m³/hr) Fan Type suitability (m²)* rating (dB) Light power (W) 2x275 45 280 Centrifugal 8 45 8 4x275 45 280 Centrifugal 8 45 12 2x275 45 305 Centrifugal 8 42 10 4x275 45 305 Centrifugal 11 45 12 2x275 40 400 Centrifugal 11 47 12 2x275 40 400 Centrifugal 15 52 20 2x275 40 400 Centrifugal 15 52 20 2000 45 535 Centrifugal 15 52 20 2000 45 535 Centrifugal 14 45 20 1000 70 500 Centrifugal 14 45 20 1000 70 480 Centrifugal

^{*}Calculated based on 2.4m ceiling

¹3000K, 4000K, 5000K



Lumens (Im)	сст	CRI	LED lifetime (hr)	IP rating	Panel size (mm)	Colour	Cut out size (mm)	Min ceiling depth (mm)
-	-	-	-	IPX4	Ø270	Matte white	Ø240	220
-	-	-	-	IPX4	Ø265	Matte white	Ø240	220
-	-	-	-	IPX4	265x265	Matte white	Ø240	220
-	-	-	-	IPX4	Ø320	Matte white	Ø290	220
-	-	-	-	IPX4	320x320	Matte white	Ø290	220
900, 1000, 900	TRI-CCT ¹	>80	54,000	IPX4	Ø265	Matte white	Ø240	220
1300, 1500, 1300	TRI-CCT ¹	>80	54,000	IPX4	Ø320	Matte white	Ø290	220
-	-	-	-	IPX4	Ø275	Matte white	Ø240	200
-	-	-	-	IPX4	Ø320	Matte white	Ø295	240
1600, 1700, 1650	TRI-CCT ¹	>80	>60,000	IPX4	Ø320	Matte white	Ø295	240
-	-	-	-	IPX2	Ø290	White	Ø240	215
-	-	-	-	IPX2	Ø345	White	Ø295	260

Lumens (lm)	сст	CRI	Light source	LED lifetime (hr)	IP rating	Panel size (mm)	Cut out size (mm)	Min ceiling depth (mm)
850	4000K	>80	R63 E27 lamp	15,000	IPX2	285x440	345x202	220
1250	4000K	>80	R80 E27 lamp	15,000	IPX2	360x400	295x295	220
880, 1000, 900	TRI-CCT1	>80	LED	>60,000	IPX4	428x230	375x202	250
880, 1000, 900	TRI-CCT1	>80	LED	>60,000	IPX4	360x360	320x320	250
975, 1090, 1080	TRI-CCT1	>80	LED panel	>60,000	IPX4	524x305	465x245	250
850, 920, 910	TRI-CCT1	>80	LED panel	>54,000	IPX2	480x290	435x275	220
1300, 1450, 1350	TRI-CCT1	>80	LED panel	>36,000	IPX2	610x339	580x310	220
1300, 1450, 1350	TRI-CCT1	>80	LED panel	>36,000	IPX2	610x339	580x310	220
1585, 1695, 1585	TRI-CCT1	>80	LED panel	54,000	IPX2	500x350	470x325	220
1585, 1695, 1585	TRI-CCT1	>80	LED panel	54,000	IPX2	500x350	470x325	220
700, 720, 710	TRI-CCT1	>80	LED panel	54,000	IPX2	430x350	400x325	220
1200, 1300, 1200	TRI-CCT1	>80	LED panel	>54,000	IPX2	330x630	310x610	200
1400, 1500, 1450	TRI-CCT1	>80	LED	54,000	IPX2	Ø400	Ø390	230
-	-	-	-	-	IPX4	Ø280	Ø266	240
-	-	-	-	-	IPX0	Ø175	Ø160	290



Frequently Asked Questions

Where is the best position to install the bathroom heater?

It depends on the bathroom model, if the heater uses IR technology then this will provide instant radiant heat directly below the unit. If the heater uses energy-efficient PTC heater technology, then it will heat the entire room with gentle, warm air. We advise giving time to warm up with PTC heaters.

Where is the best position to install the exhaust fan?

The exhaust fan is best positioned as close as possible to the shower and away from windows or doors to create cross-ventilation. It is important to size the exhaust fan to the size of your bathroom. Refer to our handy sizes on page 52.

Can I operate the heat lamps without the exhaust fan?

Yes, you can operate the exhaust fan without using the heat lamps, via the gang switch. Please refer to individual product models for specific operation.

Why is the exhaust fan not clearing all of the steam from my bathroom?

This depends on the conditions (colder climates may require much higher extraction of air rates) and cross-ventilation set-up.

Can I have the switch plate installed horizontally?


Yes, our switch mechanisms are supplied separately so that the installing electrician can install the switch plate horizontally or vertically.

Can I use another switch plate to match the rest of my house?

Yes, the installing electrician can use a different switch plate as long as it is mains-rated.

atom'

Known for our **affordable quality** products, Atom's diverse range offers solutions for every application, inside and out – from downlights, globes and strip lighting, to exterior spots, oysters and more.

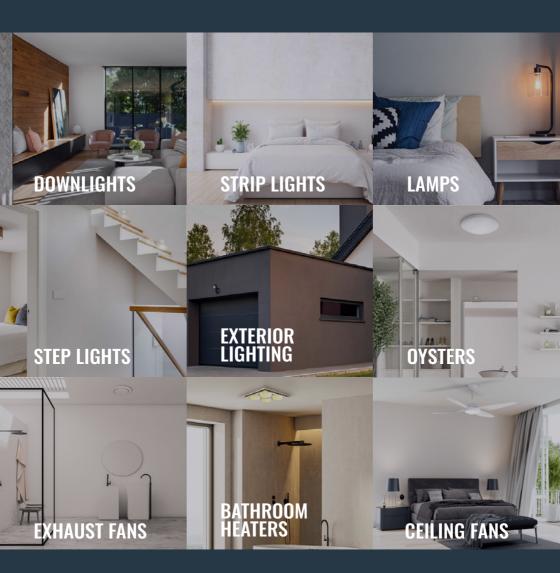

air

Due to changes in industry standards and Atom's policy of continual product development, product specifications are subject to change without notice. Images are for illustrative purpose only. E&OE. For more information, please visit our website.

evolt © Evolt July, 2024

Seven Hills NSW 2147 1300 438 658