



atom'air

AMBIENCE IN MOTION

Ceiling Fans

evolt

atom'air

Ambience in motion

Ideal for creating a **gentle, cooling breeze**, Atom Air ceiling fans provide energy-efficient air movement to enhance any home environment.

Built with quality materials and components, the range offers something to suit all modern homes, with a variety of sizes, styles and colours.





Warranty

Buy with confidence, knowing you are covered by Atom's comprehensive warranty.

Our ceiling fans have a superior 6 year warranty, including the first **4 years in-home** to cover an electrician – so you aren't out of pocket in the event of a product fault.

Choosing a ceiling fan

Ceiling fans are an essential addition to all modern homes, providing improved comfort, airflow and energy efficiency. Atom Air ceiling fans can also be a stylish addition, elevating the aesthetics of a space.


Size matters

It's important to choose a fan that's large enough to deliver sufficient airflow for the space. Atom Air DC ceiling fans offer 8 speeds including turbo mode, giving greater control.

Blade Size	Room Size	Room Type
<48" (1220mm)	<9m²	Small bedroom, office
48" (1220mm) - 56" (1422mm)	9m² - 16m²	Master bedrooms, living areas, dining areas
56" (1422mm) - 66" (1676mm)	16m² - 36m²	Large entertainment areas, living room
>66" (1676mm)	>36m²	Large entertainment areas, outside undercover areas

Year-round comfort


Ceiling fans equipped with summer and winter modes offer year-round comfort and energy efficiency. In summer mode, the fan blades rotate anticlockwise, creating a comfortable breeze that cools the skin. In winter mode, the fan blades rotate clockwise, effectively moving warm air from heaters throughout the room without the same wind chill effect. This recirculation of warm air helps to eliminate cold spots and improves the effectiveness of heating systems.

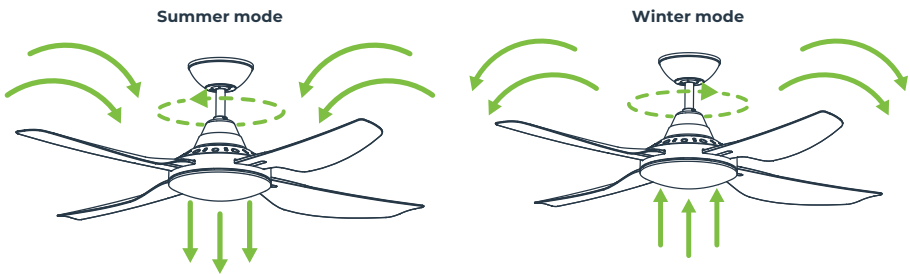

Ceilings


The Atom Air range of fans has been designed to suit standard Australian ceiling heights. In areas with a high ceiling, an extension rod can help ensure sufficient airflow. Alternatively, in rooms with a low ceiling height, a low-profile or hugger-style fan can be used. In areas with a raked (sloped) ceiling, there may be a need for an extension to ensure clearance from the ceiling and walls.

Style

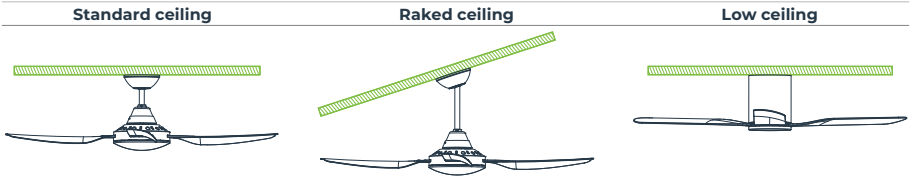

Style plays a crucial role in choosing the perfect ceiling fan that complements the aesthetic of a space. With a wide range of designs, finishes, and features available, ceiling fans offer not only functional benefits but also contribute to the visual appeal of a room. Factors such as blade shape, colour and lighting options should be considered to ensure a cohesive design.

Other factors to consider:

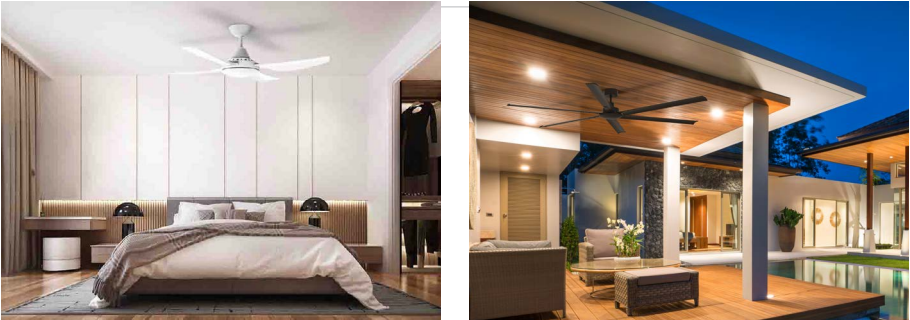

With a whisper-quiet operation, Atom Air DC fans minimise noise disruptions, allowing for quiet enjoyment of the cooling breeze without any distracting sounds. This is particularly beneficial for ceiling fans in bedrooms.

Having a remote control for a ceiling fan brings a remarkable level of convenience, allowing you to effortlessly adjust the fan's speed, direction, and lighting from anywhere in the room without having to get up.



DC Ceiling fans

Combining sleek design and advanced technology, Atom Air **DC ceiling fans** provide whisper-quiet operation, energy efficiency and impressive airflow.

With a lightweight body and a quick-connect wiring solution, they are a breeze to install.

Atom Air DC ceiling fans are supplied with 8-speeds including turbo mode, remote control, and a timer function – offering optimal customisation, comfort, and cost savings.

Ibiza	10
Vanuatu	14
Sanur	18
Venice	22
Mooloolah	26
Cyclonic	28



IBIZA

The Ibiza is a 3-blade ceiling fan with a sleek, modern design and an energy-efficient 40W DC motor. Pre-balanced ABS blades offer a quiet and balanced operation, and a quick assembly and wiring design makes for a fast install. The included 8-speed remote control has a timer, and turbo and natural wind modes.



Warranty
First 4 years
in-home



40W
DC motor



Max Airflow
12,500m³/hr
(48" size)

Product features

- Quiet and efficient 40W DC motor
- ABS construction ideal for coastal conditions
- Includes 8 speed remote control with turbo and timer function
- Quick connect wiring and easy blade assembly for ease of installation
- Suitable for outdoor undercover areas

Accessories

11346 DCREMOTE/WALL/WH

12511 ROD/90/WH

12512 ROD/90/BK

12513 ROD/150/WH

12514 ROD/150/BK

Product range

	Order code	Barcode no.
IBIZA/48/WH	15225	9336462152256
IBIZA/52/BK	15228	9336462152287
IBIZA/52/WH	15227	9336462152270

Product specifications

Voltage		220-240V~ 50Hz
Power consumption		40W
Electrical classification		I
Motor		Ø85x18mm DC motor
IP rating		IP20
Blades		3
Blade pitch	IBIZA/48	13,5°
	IBIZA/52	13°
Airflow	IBIZA/48	12,500m³/hr (max)
	IBIZA/52	12,000m³/hr (max)
RPM	IBIZA/48	235 (max)
	IBIZA/52	205 (max)
Max ceiling rake		15°
Control		Remote control
Speeds		8
Body material		ABS
Blade material		ABS
Warranty		6 years (4 years in-home + 2 years return to base)

Finish




Satin White




Matt Black

IBIZA/48



IBIZA/52





IBIZA

With tri-colour LED

The Ibiza is a 3-blade ceiling fan with a sleek, modern design and an energy efficient 40W DC motor. A 19W dimmable tri-colour LED light offers convenient lighting by remote control. The pre-balanced ABS blades are quiet and balanced in operation, and a quick assembly and wiring design makes for a fast install. The included 8-speed remote control has a timer, and turbo and natural wind modes.



TRI-CCT
luminaire



40W
DC motor



Max Airflow
12,500m³/hr
(48" size)

Product features

- Quiet and efficient 40W DC motor
- 19W dimmable tri-colour (3000K, 4000K, 5000K) LED light
- ABS construction ideal for coastal conditions
- Includes 8 speed remote control with turbo and timer function
- Quick connect wiring and easy blade assembly for ease of installation
- Suitable for outdoor undercover areas

Accessories

11346 DCREMOTE/WALL/WH

12511 ROD/90/WH

12512 ROD/90/BK

12513 ROD/150/WH

12514 ROD/150/BK

Product range

	Order code	Barcode no.
IBIZA/48/LT/WH	15226	9336462152263
IBIZA/52/LT/BK	15230	9336462152300
IBIZA/52/LT/WH	15229	9336462152294

Product specifications

Voltage		220-240V~ 50Hz
Power consumption		40W
Electrical classification		I
Motor		Ø85x18mm DC motor
IP rating		IP20
Blades		3
Blade pitch	IBIZA/48	13.5°
	IBIZA/52	13°
Airflow	IBIZA/48	12,500m³/hr (max)
	IBIZA/52	12,000m³/hr (max)
RPM	IBIZA/48	235 (max)
	IBIZA/52	205 (max)
Max ceiling rake		15°
Control		Remote control
Speeds		8
Body material		ABS
Blade material		ABS
Warranty		6 years (4 years in-home + 2 years return to base)
Light		19W
Lumens	IBIZA/WH	1240lm, 1385lm, 1240lm
	IBIZA/BK	900lm, 1040lm, 960lm
CCT		3000K, 4000K, 5000K
Beam angle		120°
CRI		>80

Finish




Satin White




Matt Black

IBIZA/48/LT



IBIZA/52/LT





Warranty
First 4 years
in-home



40W
DC motor



Wall Controller
included

VANUATU

The Vanuatu DC Ceiling Fan offers the energy-efficiency and quiet running of a DC motor with the convenience and simplicity of a traditional 3-speed wall controller. This is ideal for rentals, schools, and commercial installs where lost remotes can be a problem. The Vanuatu features our convenient easy blade assembly and quick connect wiring for fast installation

Product features

- Quiet and efficient 40W DC motor
- 3-speed wall controller
- ABS construction perfect for coastal conditions
- Reversible operation for summer and winter

Accessories

12511 ROD/90/WH

12513 ROD/150/WH

Product range

	Order code	Barcode no.
VANUATU/36/WH	11374	9336462113745
VANUATU/48/WH	15221	9336462152218
VANUATU/52/WH	15223	9336462152232

Product specifications


Voltage		220-240V~ 50Hz
Power consumption		40W
Electrical classification		I
Motor		Ø85x18mm DC motor
IP rating		IP20
Blades		4
Blade pitch	VANUATU/36	11.5°
	VANUATU/48	11°
	VANUATU/52	10°
Airflow	VANUATU/36	11,200m³/hr (max)
	VANUATU/48	11,200m³/hr (max)
	VANUATU/52	11,100m³/hr (max)
RPM	VANUATU/36	295 (max)
	VANUATU/48	206 (max)
	VANUATU/52	186 (max)
Max ceiling rake		15°
Control		Wall control
Body material		ABS
Blade material		ABS
Warranty		6 years (4 years in-home + 2 years return to base)

Finish



Satin White

VANUATU

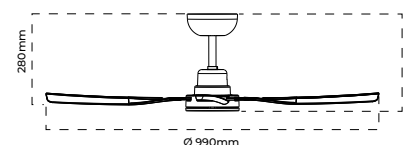

	a.	b.	c.
VANUATU/36	280mm	910mm	300mm
VANUATU/48	280mm	1220mm	300mm
VANUATU/52	280mm	1320mm	300mm



TRI-CCT
luminaire



40W
DC motor



Wall Controller
included

VANUATU

With tri-colour LED

The Vanuatu DC Ceiling Fan offers the energy-efficiency and quiet running of a DC motor with the convenience and simplicity of a traditional 3-speed wall controller. Also available with a 15W dimmable tri-colour LED, it's ideal for rentals, schools, and commercial installs where lost remotes can be a problem. The Vanuatu features our convenient easy blade assembly and quick connect wiring for fast installation

Product features

- Quiet and efficient 40W DC motor
- 3-speed wall controller
- 15W dimmable tri-colour LED
- ABS construction perfect for coastal conditions
- Reversible operation for summer and winter

Accessories

12511 ROD/90/WH

12513 ROD/150/WH

Product range

	Order code	Barcode no.
VANUATU/36/LT/WH	11375	9336462113752
VANUATU/48/LT/WH	15222	9336462152225
VANUATU/52/LT/WH	15224	9336462152249


Product specifications

Voltage		220-240V~ 50Hz
Power consumption		40W
Electrical classification		I
Motor		Ø85x18mm DC motor
IP rating		IP20
Blades		4
Blade pitch	VANUATU/36	11.5°
	VANUATU/48	11°
	VANUATU/52	10°
Airflow	VANUATU/36	11,200m³/hr (max)
	VANUATU/48	11,200m³/hr (max)
	VANUATU/52	11,100m³/hr (max)
RPM	VANUATU/36	295 (max)
	VANUATU/48	206 (max)
	VANUATU/52	186 (max)
Max ceiling rake		15°
Control		Wall control
Body material		ABS
Blade material		ABS
Warranty		6 years (4 years in-home + 2 years return to base)
Light		15W
Lumens		1050lm, 1145lm, 1045lm
CCT		3000K, 4000K, 5000K
Beam angle		120°
CRI		>80

Finish

 Satin White

VANUATU



	a.	b.	c.
VANUATU/36/LT	280mm	910mm	330mm
VANUATU/48/LT	280mm	1220mm	330mm
VANUATU/52/LT	280mm	1320mm	330mm



SANUR

The Sanur 4-blade DC ceiling fan is a modern take on the traditional, incorporating new technology. It features a stylish 8-speed remote control including turbo-air function and up to 12-hour timer. It is equipped with an energy-efficient 40W DC motor, enabling powerful airflow, and is fitted with our quick-connect wiring solution for easy installation.



Warranty
First 4 years
in-home



40W
DC motor



Max Airflow
15,600m³/hr
(52" size)

Product features

- Modern and efficient energy saving 40W DC motor
- Slimline design ideal for indoor and outdoor covered applications
- ABS body and canopy with 4 reinforced ABS blades
- Pre-balanced for smoother quieter operation
- Hangsure ball-mount ceiling canopy suits ceilings of rakes up to 15°
- Fully reversible for summer and winter use switchable from the remote

Accessories

12507 DCREMOTE/WH
12508 DCREMOTE/BK
11346 DCREMOTE/WALL/WH

12511 ROD/90/WH
12512 ROD/90/BK
12513 ROD/150/WH
12514 ROD/150/BK

Product range

	Order code	Barcode no.
SANUR/48/BK	18454	9336462184547
SANUR/48/WH	18453	9336462184530
SANUR/52/BK	18458	9336462184585
SANUR/52/WH	18457	9336462184578

Product specifications

Voltage	220-240V~ 50Hz	
Power consumption	40W	
Electrical classification	I	
Motor	153x8mm DC motor	
IP rating	IP20	
Blades	4	
Blade pitch	13.5°	
Airflow	SANUR/48	13,000m³/hr (max)
	SANUR/52	15,600m³/hr (max)
RPM	SANUR/48	260 (max)
	SANUR/52	240 (max)
Max ceiling rake	15°	
Control	Remote control	
Body material	ABS	
Blade material	ABS	
Warranty	6 years (4 years in-home + 2 years return to base)	

Finish




Satin White




Matt Black

SANUR/48



SANUR/52





SANUR

With tri-colour LED

The Sanur 4-blade DC ceiling fan is a modern take on the traditional, incorporating new technology. It features a stylish 8-speed remote control including turbo-air function, up to 12-hour timer, and a 20W dimmable tri-colour LED light. It is equipped with an energy-efficient 40W DC motor, and is fitted with our quick-connect wiring solution for ease of installation.



TRI-CCT
luminaire



40W
DC motor



Max Airflow
15,600m³/hr
(52" size)

Product features

- Modern design ideal for indoor and outdoor covered applications
- ABS body and canopy with 4 reinforced ABS blades
- Pre-balanced for smoother quieter operation
- 20W dimmable tri-colour (3000K, 4000K, 5000K) LED light
- Switchable summer/winter modes from remote handset
- Hangsure ball-mount ceiling canopy suits ceilings of rakes up to 15°

Accessories

12507 DCREMOTE/WH
12508 DCREMOTE/BK
11346 DCREMOTE/WALL/WH

12511 ROD/90/WH
12512 ROD/90/BK
12513 ROD/150/WH
12514 ROD/150/BK

Product range

	Order code	Barcode no.
SANUR/48/LT/WH	18455	9336462184554
SANUR/48/LT/BK	18456	9336462184561
SANUR/52/LT/WH	18459	9336462184592
SANUR/52/LT/BK	18460	9336462184608

Product specifications

Voltage		220-240V~ 50Hz
Power consumption		40W
Electrical classification		I
Motor		153x8mm DC motor
IP rating		IP20
Blades		4
Blade pitch		13.5°
Airflow	SANUR/48	13,000m³/hr (max)
	SANUR/52	15,600m³/hr (max)
RPM	SANUR/48	260 (max)
	SANUR/52	240 (max)
Max ceiling rake		15°
Control		Remote control
Body material		ABS
Blade material		ABS
Warranty		6 years (4 years in-home + 2 years return to base)
Light		20W
Lumens		1500lm, 1600lm, 1600lm
CCT		3000K, 4000K, 5000K
Beam angle		120°
CRI		>80

Finish




Satin White




Matt Black

SANUR/48/LT



SANUR/52/LT





VENICE **SERIES II**

The Venice is a market-leading choice in terms of versatility. It is supplied as a universal 3/4-blade ceiling fan, allowing for blade quantity configuration during installation to suit a wide range of applications. It features an energy-efficient 38W DC motor, enabling leading airflow, and is equipped with our quick-connect wiring solution for easy installation.



Warranty
First 4 years
in-home



3/4 blade
fitting option



Quick
connect

Product features

- Slimline design ideal for indoor and outdoor covered applications
- ABS body and metal canopy with reinforced ABS blades
- Pre-balanced for smoother quieter operation
- Fully reversible for summer and winter use from remote
- Supplied with 8-speed remote including turbo speed function and timer with up to 12 hour timer control mode

Accessories

12507 DCREMOTE/WH
12508 DCREMOTE/BK
11346 DCREMOTE/WALL/WH

12511 ROD/90/WH
12512 ROD/90/BK
12513 ROD/150/WH
12514 ROD/150/BK

Product range

	Order code	Barcode no.
VENICE/52/WH	10171	9336462101711

Product specifications


Voltage	220-240V~ 50Hz
Power consumption	38W
Electrical classification	I
Motor	85x18mm DC motor
IP rating	IP20
Blades	3 or 4
Blade pitch	12.5°
Airflow	12,051m³/hr (max) (4-blade)
RPM	240 (max) (4-blade), 250 (max) (3-blade)
Max ceiling rake	15°
Control	Remote control
Body material	ABS
Blade material	ABS
Warranty	6 years (4 years in-home + 2 years return to base)

Finish



Satin White

VENICE/52/WH





VENICE SERIES II

With tri-colour LED

The Venice DC fan is a market-leading choice in terms of versatility. It is supplied as a universal 3/4-blade ceiling fan, allowing for blade quantity configuration during installation to suit a wide range of applications. It features an energy-efficient 38W DC motor, a 17W dimmable tri-colour LED light, and is equipped with our quick-connect wiring solution for easy installation.



TRI-CCT
luminaire



3/4 blade
fitting option



Max Airflow
12,051m³/hr

Product features

- Slimline design ideal for indoor and outdoor covered applications
- ABS body and metal canopy with reinforced ABS blades
- Pre-balanced for smoother quieter operation
- 17W dimmable tri-colour LED light switchable colour temperature (3000K, 4000K & 5000K).
- Fully reversible for summer and winter use from remote
- Supplied with 8-speed remote including turbo speed function and timer with up to 12 hour timer control mode

Accessories

12507 DCREMOTE/WH
12508 DCREMOTE/BK
11346 DCREMOTE/WALL/WH

12511 ROD/90/WH
12512 ROD/90/BK
12513 ROD/150/WH
12514 ROD/150/BK

Product range

	Order code	Barcode no.
VENICE/52/LT/WH	10172	9336462101728

Product specifications


Voltage	220-240V~ 50Hz
Power consumption	38W
Electrical classification	I
Motor	85x18mm DC motor
IP rating	IP20
Blades	3 or 4
Blade pitch	12.5°
Airflow	12,051m ³ /hr (max) (4-blade)
RPM	240 (max) (4-blade), 250 (max) (3-blade)
Max ceiling rake	15°
Control	Remote control
Body material	ABS
Blade material	ABS
Warranty	6 years (4 years in-home + 2 years return to base)
Light	17W
Lumens	1350lm, 1500lm, 1500lm
CCT	3000K, 4000K, 5000K
Beam angle	120°
CRI	>80


Finish



Satin White

VENICE/52/LT/WH



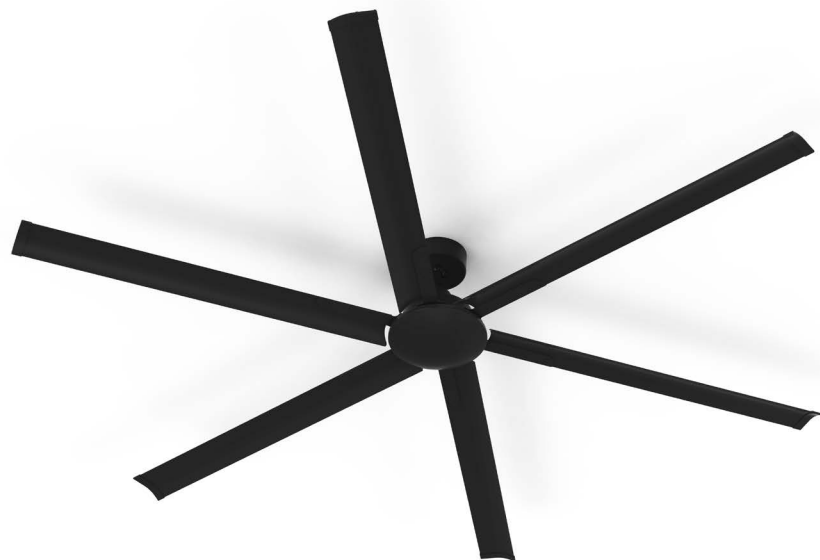

MOOLOOLAH

The Mooloolah ceiling fan, measuring 84" (2130mm), is designed to deliver maximum airflow to larger spaces. Perfect for gyms, commercial environments, large living areas, enclosed alfresco spaces, and large outdoor garages, the Mooloolah fan combines powerful performance with sleek design. It also features our quick-connect wiring solution for effortless installation.



Warranty
First 4 years
in-home



55W
DC motor



Max Airflow
19,500m³/hr

Product features

- Powerful and efficient fan with a 55W brushless DC motor
- Air movement up to 19,500m³/hr
- Metal body and canopy with 6 corrosion-resistant anodised aluminium blades
- Pre-balanced for smoother quieter operation
- Fully reversible for summer and winter use from remote
- Supplied with 8-speed remote including turbo speed function and timer with up to 12 hour timer control mode

Accessories

12507 DCREMOTE/WH
12508 DCREMOTE/BK

12511 ROD/90/WH
12512 ROD/90/BK
12513 ROD/150/WH
12514 ROD/150/BK

Product range

	Order code	Barcode no.
MOOLOOLAH/84/BK	18487	9336462184875


Product specifications


Voltage	220-240V~ 50Hz
Power consumption	55W
Electrical classification	I
Motor	153x15mm DC motor
IP rating	IP20
Blades	6
Blade pitch	11°
Airflow	19,500m ³ /hr (max)
RPM	90 (max)
Max ceiling rake	15°
Control	Remote control
Body material	Metal
Blade material	Aluminium
Warranty	6 years (4 years in-home + 2 years return to base)

Finish



MOOLOOLAH/84



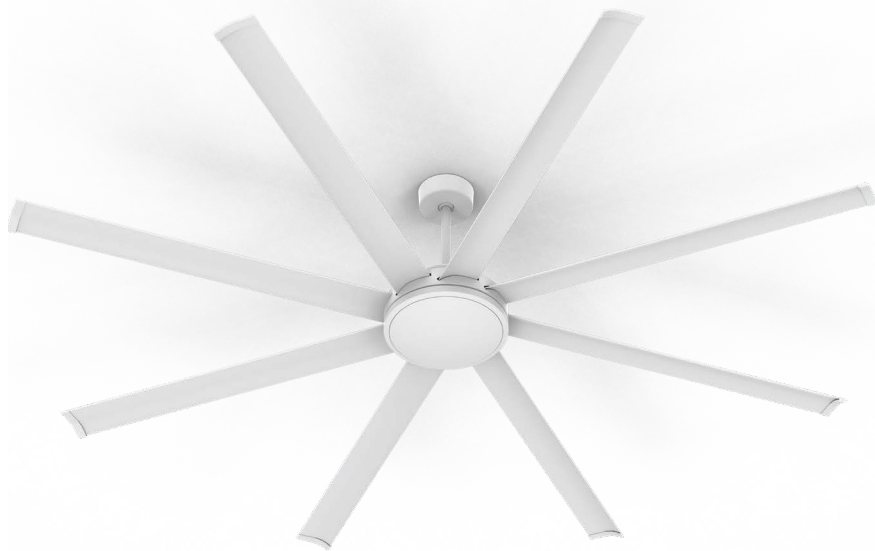

CYCLONIC

The Cyclonic 92" (2337mm) ceiling fan is the largest and most powerful in the Atom Air range, designed to deliver superior airflow to expansive spaces. With extruded aluminium blades, it's ideal for installation in large areas such as offices, halls, and covered alfresco areas where airflow and reach are critical. Additionally, the Cyclonic is fitted with our quick-connect wiring solution for easy installation.



Warranty
First 4 years
in-home



80W
DC motor



Max Airflow
25,700m³/hr

Product features

- Powerful and efficient fan with 80W DC motor
- Air movement up to 25,700m³/hr
- Metal body and canopy with 8 corrosion-resistant anodised aluminium blades
- Pre-balanced for smoother quieter operation
- Fully reversible for summer and winter use from remote
- Supplied with 8-speed remote including turbo speed function and timer with up to 12 hour timer control mode

Accessories

12507 DCREMOTE/WH
11346 DCREMOTE/WALL/WH

14054 CYCLONIC/ROD/90/WH
14055 CYCLONIC/ROD/90/BK
14056 CYCLONIC/ROD/150/WH
14057 CYCLONIC/ROD/150/BK

Product range

	Order code	Barcode no.
CYCLONIC/92/WH	15611	9336462156117
CYCLONIC/92/BK	15612	9336462156124

Product specifications

Voltage	220-240V~ 50Hz
Power consumption	80W
Electrical classification	I
Motor	188x22mm DC motor
IP rating	IP20
Blades	8
Blade pitch	10°
Airflow	25,700m ³ /hr (max)
RPM	90 (max)
Max ceiling rake	15°
Control	Remote control
Body material	Metal
Blade material	Aluminium
Warranty	6 years (4 years in-home + 2 years return to base)

Finish




Satin White



Matt Black

CYCLONIC/92





CYCLONIC

With tri-colour LED

The Cyclonic 92" (2337mm) ceiling fan is the largest and most powerful in the Atom Air range, designed to deliver superior airflow to expansive spaces. With extruded aluminium blades and a 33W tri-colour LED, it's ideal for installation in large areas such as offices, halls, and covered alfresco areas where airflow and ample lighting are critical.



TRI-CCT
luminaire



80W
DC motor



Max Airflow
25,700m³/hr

Product features

- Powerful and efficient fan with 80W DC motor
- Air movement up to 25,700m³/hr
- Metal body and canopy with 8 corrosion-resistant anodised aluminium blades
- Pre-balanced for smoother quieter operation
- Fully reversible for summer and winter use from remote
- Supplied with 8-speed remote including turbo speed function and timer with up to 12 hour timer control mode

Accessories

12507 DCREMOTE/WH
11346 DCREMOTE/WALL/WH

14054 CYCLONIC/ROD/90/WH
14056 CYCLONIC/ROD/150/WH

Product range

	Order code	Barcode no.
CYCLONIC/92/LT/WH	15613	9336462156131

Product specifications


Voltage	220-240V~ 50Hz
Power consumption	80W
Electrical classification	I
Motor	188x22mm DC motor
IP rating	IP20
Blades	8
Blade pitch	10°
Airflow	25,700m ³ /hr (max)
RPM	90 (max)
Max ceiling rake	15°
Control	Remote control
Body material	Metal
Blade material	Aluminium
Warranty	6 years (4 years in-home + 2 years return to base)
Light	33W
Lumens	2000lm, 2300lm, 2200lm
CCT	3000K, 4000K, 5000K
Beam angle	100°
CRI	>80

Finish



Satin White

CYCLONIC/92/LT





AC Ceiling fans

Experience a refreshing breeze throughout the home with the Atom Air range of **AC ceiling fans**.

Offering an **affordable quality** air movement solution, Atom Air AC ceiling fans provide the ability to switch between summer and winter modes, delivering year-round comfort.

With a choice of wall or remote control (sold separately), Atom Air AC ceiling fans offer flexibility, with a variety of sizes, styles and lighting options to suit any modern home.

Coolum	34
Ceduna.....	38



COOLUM

The Coolum 4-blade ceiling fan is a traditional 3-speed AC fan manufactured with an efficient design, a powerful 75W AC motor and a 3-speed wall controller.



Warranty
First 4 years
in-home



75W
AC motor



Wall Controller
included

Product features

- Powerful 75W AC motor
- Easy installation with our quick connect wiring solution
- Pre-balanced for smoother, quieter operation
- Slimline design ideal for indoor and outdoor covered applications
- ABS body and canopy with 4 reinforced ABS blades
- Hangsure ball-mount ceiling canopy suits ceilings of rakes up to 15°
- Reversible for summer and winter use
- Optional remote control (sold separately)

Accessories

12509 ACREMOTE/KIT/WH
12511 ROD/90/WH
12512 ROD/90/BK

12513 ROD/150/WH
12514 ROD/150/BK

Product range

	Order code	Barcode no.
COOLUM/48/WH	18445	9336462184455
COOLUM/48/BK	18446	9336462184462
COOLUM/52/WH	18449	9336462184493
COOLUM/52/BK	18450	9336462184509
COOLUM/56/WH	15239	9336462152393
COOLUM/56/BK	15241	9336462152416

Product specifications

Voltage	220-240V~ 50Hz	
Power consumption	75W	
Electrical classification	I	
Motor	172x20mm AC motor	
IP rating	IP20	
Blades	4	
Blade pitch	COOLUM/48 & 52	13.5°
	COOLUM/56	10.5°
Airflow	COOLUM/48	13,800m³/hr (max)
	COOLUM/52	16,200m³/hr (max)
	COOLUM/56	16,300m³/hr (max)
	COOLUM/48	270 (max)
RPM	COOLUM/52	257 (max)
	COOLUM/56	220 (max)
Max ceiling rake	15°	
Control	Wall control	
Body material	ABS	
Blade material	ABS	
Warranty	6 years (4 years in-home + 2 years return to base)	

Finish




Satin White



Matt Black

COOLUM



	a.	b.	c.
COOLUM/48	299mm	1220mm	327mm
COOLUM/52	299mm	1320mm	327mm
COOLUM/56	267mm	1420mm	351mm



COOLUM

With tri-colour LED

The Coolum 4-blade ceiling fan is a traditional 3-speed AC fan that includes a 20W tri-colour LED light. Coolum ceiling fans are manufactured with an efficient design, a powerful 75W AC motor and a 3-speed wall controller.

Product features

- Easy installation with our quick connect wiring solution
- Pre-balanced for smoother, quieter operation
- Slimline design ideal for indoor and outdoor covered applications
- ABS body and canopy with 4 reinforced ABS blades
- Hangsure ball-mount ceiling canopy suits ceilings of rakes up to 15°
- Reversible for summer and winter use
- 20W dimmable tri-colour LED
- Switchable colour temperature (3000K, 4000K & 5000K)
- Optional remote control (sold separately)

Accessories

12509 ACREMOTE/KIT/WH

12511 ROD/90/WH

12512 ROD/90/BK

12513 ROD/150/WH

12514 ROD/150/BK

Product range

	Order code	Barcode no.
COOLUM/48/LT/WH	18447	9336462184479
COOLUM/48/LT/BK	18448	9336462184486
COOLUM/52/LT/WH	18451	9336462184516
COOLUM/52/LT/BK	18452	9336462184523

Product specifications

Voltage		220-240V~ 50Hz
Power consumption		75W
Electrical classification		I
Motor		172x20mm AC motor
IP rating		IP20
Blades		4
Blade pitch		13,5°
Airflow	COOLUM/48	13,800m³/hr (max)
	COOLUM/52	16,200m³/hr (max)
RPM	COOLUM/48	270 (max)
	COOLUM/52	257 (max)
Max ceiling rake		15°
Control		Wall control
Body material		ABS
Blade material		ABS
Warranty		6 years (4 years in-home + 2 years return to base)
Light		20W
Lumens		1500lm, 1600lm, 1600lm
CCT		3000K, 4000K, 5000K
Beam angle		120°
CRI		>80

Finish




Satin White




Matt Black

COOLUM/48/LT



COOLUM/52/LT





CEDUNA

The traditionally-styled 3-blade Ceduna ceiling sweep fan is a modern take on a traditional icon. This 48" (1220mm) AC model is supplied with a 3-speed wall controller. It is pre-balanced for ease of installation, and is fitted with our quick-connect wiring solution for added convenience.



Warranty
First 4 years
in-home



45W
AC motor



Wall Controller
included

Product features

- Efficient 45W AC motor with 3 speed wall controller
- Reversible for summer and winter use
- ABS body and canopy with 3 reinforced ABS blades
- Pre-balanced for smoother quieter operation
- Suitable for indoor and covered outdoor use
- Optional remote control (sold separately)

Accessories

12509 ACREMOTE/KIT/WH
12511 ROD/90/WH
12513 ROD/150/WH

Product range

	Order code	Barcode no.
CEDUNA/48/WH	18468	9336462184684


Product specifications

Voltage	220-240V~ 50Hz
Power consumption	45W
Electrical classification	I
Motor	153x12mm AC motor
IP rating	IP20
Blades	3
Blade pitch	9°
Airflow	9,300m ³ /hr (max)
RPM	245 (max)
Max ceiling rake	15°
Control	Wall control
Body material	ABS
Blade material	ABS
Warranty	6 years (4 years in-home + 2 years return to base)

Finish

 Satin White

CEDUNA/48/WH

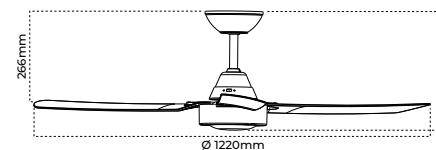



CEDUNA

With tri-colour LED

The traditionally-styled 3-blade Ceduna ceiling sweep fan is a modern take on a traditional icon. This 48" (1220mm) AC model comes with a fitted slimline 16W LED light kit and is supplied with a 3-speed wall controller for convenient operation. It is pre-balanced for ease of installation and features our quick-connect wiring solution for added convenience.



Warranty
First 4 years
in-home



45W
AC motor



Wall Controller
included

Product features

- Efficient 45W AC motor with 3 speed wall controller
- Reversible for summer and winter use
- ABS body and canopy with 3 reinforced ABS blades
- Pre-balanced for smoother quieter operation
- Suitable for indoor and covered outdoor use
- 16W dimmable tri-colour LED
- Switchable colour temperature (3000K, 4000K & 5000K)
- Optional remote control (sold separately)

Accessories

12509 ACREMOTE/KIT/WH
12511 ROD/90/WH
12513 ROD/150/WH

Product range

	Order code	Barcode no.
CEDUNA/48/LT/WH	18469	9336462184691

Product specifications


Voltage	220-240V~ 50Hz
Power consumption	45W
Electrical classification	I
Motor	153x12mm AC motor
IP rating	IP20
Blades	3
Blade pitch	9°
Airflow	9,300m³/hr (max)
RPM	245 (max)
Max ceiling rake	15°
Control	Wall control
Body material	ABS
Blade material	ABS
Warranty	6 years (4 years in-home + 2 years return to base)
Light	16W
Lumens	1250lm, 1400lm, 1350lm
CCT	3000K, 4000K, 5000K
Beam angle	120°
CRI	>80

Finish



Satin White

CEDUNA/48/WH/LT

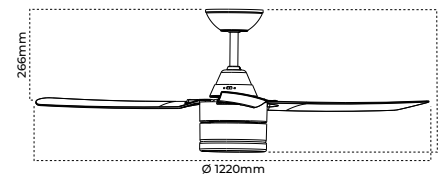

Remotes & Wall Kits



DCREMOTE/WH

SKU: 12507
Remote control for DC ceiling fans - Remote only - White



DCREMOTE/BK

SKU: 12508
Remote control for DC ceiling fans - Remote only - Black



DCREMOTE/WALL/WH

SKU: 11346
Wall-mount remote control for DC ceiling fans - White



ACREMOTE/KIT/WH

SKU: 12509
Remote control receiver and remote kit for AC ceiling fans - White

Range	DCREMOTE	DCREMOTE/WALL	ACREMOTE/KIT
COOLUM			●
CEDUNA			●
IBIZA	●	●	
VANUATU	●	●	
SANUR	●	●	
VENICE SERIES II	●	●	
MOOLOOLAH	●	●	
CYCLONIC	●	●	

Rods



ROD/90/WH

SKU: 12511
900mm Extension rod for ceiling fans with loom - White



ROD/90/BK

SKU: 12512
900mm Extension rod for ceiling fans with loom - Black



ROD/150/WH

SKU: 12513
1500mm Extension rod for ceiling fans with loom - White



ROD/150/BK

SKU: 12514
1500mm Extension rod for ceiling fans with loom - Black



CYCLONIC/ROD/90/WH

SKU: 14054
900mm Extension rod for Cyclonic ceiling fans with loom - White



CYCLONIC/ROD/90/BK

SKU: 14055
900mm Extension rod for Cyclonic ceiling fans with loom - Black



CYCLONIC/ROD/150/WH

SKU: 14056
1500mm Extension rod for Cyclonic ceiling fans with loom - White



CYCLONIC/ROD/150/BK

SKU: 14057
1500mm Extension rod for Cyclonic ceiling fans with loom - Black

Range	ROD/90	ROD/150	CYCLONIC/ROD/90	CYCLONIC/ROD/150
COOLUM	●	●		
CEDUNA	●	●		
IBIZA	●	●		
VANUATU	●	●		
SANUR	●	●		
VENICE SERIES II	●	●		
MOOLOOLAH	●	●		
CYCLONIC			●	●

Selection Guide

DC Fans

Product name	Motor power (W)	No. of speeds	Air movement (m3/hr max.)	Max RPM	Area suitability	Light power (W)	Lumens (lm)	CCT	Dimmable	Control type	Body material	Blade material	No. of blades	Colour	Timer function	Total diameter (mm)
IBIZA/48/WH	40W	8	12,500	235	<9m²	-	-	-	-	Remote	ABS	ABS	3	White	Yes	1220mm
IBIZA/48/LT/WH	40W	8	12,500	235	<9m²	19W	1240, 1385, 1240	3000K, 4000K, 5000K	Yes	Remote	ABS	ABS	3	White	Yes	1220mm
IBIZA/52/WH	40W	8	12,000	205	9m²-16m²	-	-	-	-	Remote	ABS	ABS	3	White	Yes	1320mm
IBIZA/52/BK	40W	8	12,000	205	9m²-16m²	-	-	-	-	Remote	ABS	ABS	3	Black	Yes	1320mm
IBIZA/52/LT/WH	40W	8	12,000	205	9m²-16m²	19W	1240, 1385, 1240	3000K, 4000K, 5000K	Yes	Remote	ABS	ABS	3	White	Yes	1320mm
IBIZA/52/LT/BK	40W	8	12,000	205	9m²-16m²	19W	900, 1040, 960	3000K, 4000K, 5000K	Yes	Remote	ABS	ABS	3	Black	Yes	1320mm
VANUATU/36/WH	40W	3	11,200	295	<9m²	-	-	-	-	Wall	ABS	ABS	4	White	No	910mm
VANUATU/36/LT/WH	40W	3	11,200	295	<9m²	15W	1050, 1145, 1045	3000K, 4000K, 5000K	Yes	Wall	ABS	ABS	4	White	No	910mm
VANUATU/48/WH	40W	3	11,200	206	<9m²	-	-	-	-	Wall	ABS	ABS	4	White	No	1220mm
VANUATU/48/LT/WH	40W	3	11,200	206	<9m²	15W	1050, 1145, 1045	3000K, 4000K, 5000K	Yes	Wall	ABS	ABS	4	White	No	1220mm
VANUATU/52/WH	40W	3	11,100	186	9m²-16m²	-	-	-	-	Wall	ABS	ABS	4	White	No	1320mm
VANUATU/52/LT/WH	40W	3	11,100	186	9m²-16m²	15W	1050, 1145, 1045	3000K, 4000K, 5000K	Yes	Wall	ABS	ABS	4	White	No	1320mm
SANUR/48/WH	40W	8	13,000	260	<9m²	-	-	-	-	Remote	ABS	ABS	4	White	Yes	1220mm
SANUR/48/BK	40W	8	13,000	260	<9m²	-	-	-	-	Remote	ABS	ABS	4	Black	Yes	1220mm
SANUR/48/LT/WH	40W	8	13,000	260	<9m²	20W	1500, 1600, 1600	3000K, 4000K, 5000K	Yes	Remote	ABS	ABS	4	White	Yes	1220mm
SANUR/48/LT/BK	40W	8	13,000	260	<9m²	20W	1500, 1600, 1600	3000K, 4000K, 5000K	Yes	Remote	ABS	ABS	4	Black	Yes	1220mm
SANUR/52/WH	40W	8	15,600	240	9m²-16m²	-	-	-	-	Remote	ABS	ABS	4	White	Yes	1320mm
SANUR/52/BK	40W	8	15,600	240	9m²-16m²	-	-	-	-	Remote	ABS	ABS	4	Black	Yes	1320mm
SANUR/52/LT/WH	40W	8	15,600	240	9m²-16m²	20W	1500, 1600, 1600	3000K, 4000K, 5000K	Yes	Remote	ABS	ABS	4	White	Yes	1320mm
SANUR/52/LT/BK	40W	8	15,600	240	9m²-16m²	20W	1500, 1600, 1600	3000K, 4000K, 5000K	Yes	Remote	ABS	ABS	4	Black	Yes	1320mm
VENICE/52/WH	38W	8	12,051	240	9m²-16m²	-	-	-	-	Remote	ABS	ABS	3 or 4	White	Yes	1320mm
VENICE/52/LT/WH	38W	8	12,051	240	9m²-16m²	17W	1350, 1500, 1500	3000K, 4000K, 5000K	Yes	Remote	ABS	ABS	3 or 4	White	Yes	1320mm
MOOLOOLAH/84/BK	55W	8	19,500	90	>36m²	-	-	-	-	Remote	Metal	Aluminium	6	Black	Yes	2130mm
CYCLONIC/92/WH	80W	8	25,700	90	>36m²	-	-	-	-	Remote	Metal	Aluminium	8	White	Yes	2337mm
CYCLONIC/92/BK	80W	8	25,700	90	>36m²	-	-	-	-	Remote	Metal	Aluminium	8	Black	Yes	2337mm
CYCLONIC/92/LT/WH	80W	8	25,700	90	>36m²	33W	2000, 2300, 2200	3000K, 4000K, 5000K	Yes	Remote	Metal	Aluminium	8	White	Yes	2337mm

Selection Guide

AC Fans

Product name	Motor power (W)	No. of speeds	Air movement (m3/hr max.)	Max RPM	Area suitability	Light power (W)	Lumens (lm)	CCT	Dimmable	Control type	Body material	Blade material	No. of blades	Colour	Timer function	Total diameter (mm)
COOLUM/48/WH	75W	3	13,800	270	<9m ²	-	-	-	-	Wall	ABS	ABS	4	White	No	1220mm
COOLUM/48/BK	75W	3	13,800	270	<9m ²	-	-	-	-	Wall	ABS	ABS	4	Black	No	1220mm
COOLUM/48/LT/WH	75W	3	13,800	270	<9m ²	20W	1500, 1600, 1600	3000K, 4000K, 5000K	Yes	Wall	ABS	ABS	4	White	No	1220mm
COOLUM/48/LT/BK	75W	3	13,800	270	<9m ²	20W	1500, 1600, 1600	3000K, 4000K, 5000K	Yes	Wall	ABS	ABS	4	Black	No	1220mm
COOLUM/52/WH	75W	3	16,200	257	9m ² -16m ²	-	-	-	-	Wall	ABS	ABS	4	White	No	1320mm
COOLUM/52/BK	75W	3	16,200	257	9m ² -16m ²	-	-	-	-	Wall	ABS	ABS	4	Black	No	1320mm
COOLUM/52/LT/WH	75W	3	16,200	257	9m ² -16m ²	20W	1500, 1600, 1600	3000K, 4000K, 5000K	Yes	Wall	ABS	ABS	4	White	No	1320mm
COOLUM/52/LT/BK	75W	3	16,200	257	9m ² -16m ²	20W	1500, 1600, 1600	3000K, 4000K, 5000K	Yes	Wall	ABS	ABS	4	Black	No	1320mm
COOLUM/56/WH	75W	3	16,300	220	16m ² -36m ²	-	-	-	-	Wall	ABS	ABS	4	White	No	1420mm
COOLUM/56/BK	75W	3	16,300	220	16m ² -36m ²	-	-	-	-	Wall	ABS	ABS	4	Black	No	1420mm
CEDUNA/48/WH	45W	3	9,300	245	<9m ²	-	-	-	-	Wall	ABS	ABS	3	White	No	1220mm
CEDUNA/48/LT/WH	45W	3	9,300	245	<9m ²	16W	1250, 1400, 1350	3000K, 4000K, 5000K	Yes	Wall	ABS	ABS	3	White	No	1220mm

Frequently Asked Questions

What size ceiling fan is required?

The recommended size of the ceiling fan is determined by the size of the room. See our guide on page 6 about choosing the right ceiling fan.

How can a ceiling fan help save on energy costs?

Atom Air ceiling fans are equipped with summer and winter modes, providing optimal comfort and energy efficiency throughout the year. The average cost of running a ceiling fan, especially those with an energy-efficient DC motor, is significantly less than other cooling or heating systems.

In summer, a ceiling fan creates a breeze which cools down the skin. In winter, ceiling fans can be used in reverse-mode to circulate warm air from heaters throughout a space.

How does ceiling height affect ceiling fan choice?

For optimal performance, ceiling fans should be installed with a minimum 2.1m clearance from floor to the blades. In rooms with high ceilings, rods can be used to lower the fan to an appropriate height, and in rooms with low ceilings, hugger-style fans are the best option.

Can a ceiling fan be installed on a sloped ceiling?

Yes, Atom Air ceiling fans can be installed on raked or angled ceilings. Please consult the product datasheet to confirm suitability for your application. Some settings may require the installation of a rod to ensure clearance of the ceiling and walls.

Are ceiling fans suitable for outdoor use?

Atom Air ceiling fans are designed to be installed in undercover alfresco areas, away from the elements. Please refer to the instruction manual supplied with each fan for specific information.

How do I clean and maintain my ceiling fan?

Regular cleaning is essential to keep ceiling fans operating smoothly. We recommend using a soft microfibre cloth to remove dust from the fan blades and motor housing.


Can I use a remote control?

Our DC ceiling fans are supplied with a remote control as standard. AC fans are supplied with a wall control, however remote controls can be purchased separately.


Known for our **affordable quality** products, Atom's diverse range offers solutions for every application, inside and out – from downlights and strip lighting, to exterior spots, air movement and more.




Find out more

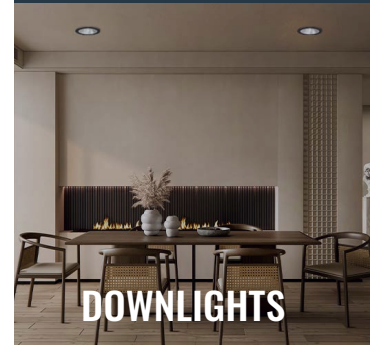


DOWNLIGHTS

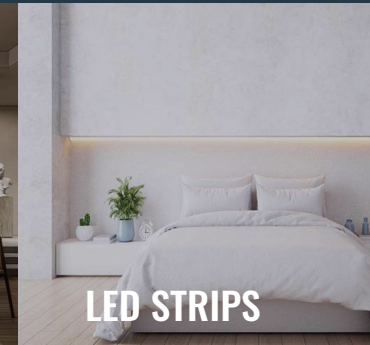

LED STRIPS

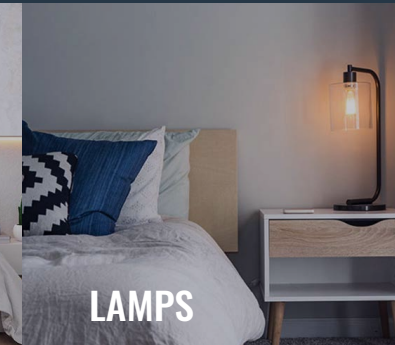

LAMPS

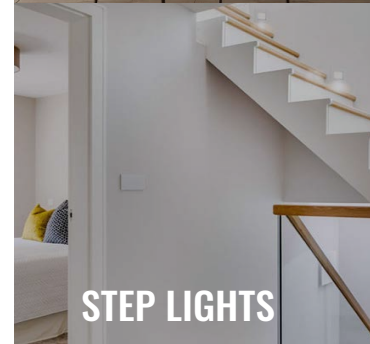

STEP LIGHTS



EXTERIOR LIGHTING



OYSTERS



EXHAUST FANS



BATHROOM HEATERS



CEILING FANS



atom^{air}

Due to changes in industry standards and Atom's policy of continual product development, product specifications are subject to change without notice. Images are for illustrative purpose only. E&OE. For more information, please visit our website.

© Evolt September, 2026

evolt

Unit 2C, 40 Barracks Rd,
Wacol QLD 4076
sales@evolt.com.au
1300 438 658
evolt.com.au